

## ACT20X-2HAI-2SAO-S

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Product image, Similar to illustration



The ACT20X-HAI-SAO/2HAI-2SAO HART-protocol transparent current-supply isolators are capable of transmitting 4...20 mA signals from Ex zone 0 into the safe zone.

External sensors can be supplied with power through the device.

Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail mounted current-supply isolators are optionally available in one- or two-channel versions.

With 11 mm width per channel, the devices need little space in the electrical cabinet.

### General ordering data

Version	EX signal isolating converter, Ex-input: 4 - 20 mA, Safe-output: 4-20mA, 2-channel
Order No.	<a href="#">8965440000</a>
Type	ACT20X-2HAI-2SAO-S
GTIN (EAN)	4032248785056
Qty.	1 pc(s).

Creation date February 28, 2023 7:08:19 PM CET

Catalogue status 18.02.2023 / We reserve the right to make technical changes.

## ACT20X-2HAI-2SAO-S

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	119.2 mm	Height (inches)	4.693 inch
Width	22.5 mm	Width (inches)	0.886 inch
Net weight	212 g		

### Temperatures

Storage temperature	-20 °C...85 °C	Operating temperature	-20 °C...60 °C
Operating temperature, min.	-20 °C	Operating temperature, max.	60 °C
Humidity	0...95 % (no condensation)		

### Probability of failure

SIL PAPER	SIL certificate	SIL in compliance with IEC 61508	2
MTBF	315 Years		

### Input EX

Input current	4...20 mA	Input frequency	0,5...2,5 kHz @ 3,5...23 mA bi-directional HART <sup>®</sup> signal
Output signal in case of wire break	< 1 mA	Residual ripple (current loop)	< 7.5 mV <sub>eff</sub>
Sensor supply	> 16 V DC	Type	intrinsically safe circuit, active (as current source) or passive (as current sink)
Voltage drop not powered	< 6 V	Voltage drop powered	< 4.5 V

### Output

Cut-off frequency (-3 dB)	0.5...2.5 kHz @ 3.5...23 mA bi-directional HART <sup>®</sup> signal	Influence of load resistance	≤ 0.01% of span / 100 Ω
Load impedance current	≤ 600 Ω	Load stability	≤ 0.01 % of end value / 100 Ω
Output current	4...20 mA	Output signal limit	< 28 mA
Type	active (as current source) or passive (as current sink)		

### Alarm output

Alarm function	Signal limit exceeded, Line interruption at the input, No supply voltage, Device error	Continuous current	≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0,5 A AC / 1 A DC (zone 2)
Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (zone 2)	Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)
Type	Status relay, 1 NC (voltage-free)		

## ACT20X-2HAI-2SAO-S

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General specifications

Accuracy	< 0.1% span	Configuration	With FDT/DTM software, Requires configuration adapter 8978580000 CBX200 USB
Humidity	0...95 % (no condensation)	Power consumption	≤ 1.9 W
Protection degree	IP20	Step response time	≤ 5 ms
Temperature coefficient	<0.01% of span/°C (TU)	Type of connection	Screw connection
Voltage supply	19.2...31.2 V DC		

## Insulation coordination

EMC standards	DIN EN 61326, NE 21	Insulation voltage	2.6 kV (input / output)
Pollution severity	2	Rated voltage	300 V
Surge voltage category	II		

## Data for Ex applications (ATEX)

Current I <sub>0</sub>	Current loop 93 mA / externally 10 mA	Installation location	Device installed in safe area, zone 2
Marking	II (1) G [Ex ia Ga] IIC/IIB/ IIA, II (1) D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I	Power P <sub>0</sub>	Current loop 0.65 W / externally 0.1 W
Voltage U <sub>0</sub>	Current loop 28 V / externally 10 V		

## Safety-related basic specifications

Description of the "safe state"	analogue Output ≤ 3.6 mA or output ≥ 21 mA	Device type	A
T <sub>proof</sub>	5 Years	Total failure rate for safe detected failures (λ <sub>SD</sub> )	0 FIT
Hardware fault tolerance (HFT)	0	Safety category	SIL 2, SIL 3 on use of 2 devices with special wiring
Safe Failure Fraction (SFF)	80 %	Mean Time To Repair (MTTR)	24 h
Total failure rate for safe undetected failures (λ <sub>SU</sub> )	0 FIT	Total failure rate for dangerous detected failures (λ <sub>DD</sub> )	173 FIT
Total failure rate for dangerous undetected failures (λ <sub>DU</sub> )	41 FIT	Probability of outage PFH	4.1 x 10 <sup>-8</sup> h <sup>-1</sup>
Demand mode	High		

## Safety-related specifications Low demand mode

Average Probability of Failure on Demand (PFD <sub>avg</sub> )	1.92 x 10 <sup>-4</sup> (T <sub>proof</sub> = 1 year), 3.67 x 10 <sup>-4</sup> (T <sub>proof</sub> = 2 years), 8.92 x 10 <sup>-4</sup> (T <sub>proof</sub> = 5 years), additional data in the safety manual
---	---

## Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.25 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Creation date February 28, 2023 7:08:19 PM CET

Catalogue status 18.02.2023 / We reserve the right to make technical changes.

3

**ACT20X-2HAI-2SAO-S**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Guarantee**

Time interval 3 years

**Classifications**

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-20	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20	ECLASS 12.0	27-21-01-20

**ACT20X-2HAI-2SAO-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Tender specification sheets**

Long specification

Short specification

**Ex supply isolator for standard DC current signals, 2-channel, HART transparent 2-channel supply isolator in 22.5 mm width with external power supply, for transmitting and isolating 4...20 mA standard signals from Ex Zones 0,1,2 to the safe zones. This component has active and passive inputs. External sensors can be supplied with > 15 VDC. The 4...20 mA output circuit can be operated either passively or actively. Status and error messages are available via a relay contact (NO).**  
 The component can be configured using standard FDT/DTM software.  
**Add-on housing for TS35 rail mounting**  
**Dimensions: L/W/H 119.2/ 22.5/ 113.6**  
**Screw connection/ Nominal cross-section 2.5 mm<sup>2</sup>**  
**Protection degree: IP 20**  
**Input 2 x 4...20 mA**  
**> 15 V DC sensor supply**  
**Output**  
**active 2**  
**x 4...20 mA**  
**passive 2 x 4...20 mA**  
**current loop max. 26 V DC**  
**Load <**  
**600 Ohm**  
**Accuracy < 0,1 % v.E**  
**Temperature coefficient < 0,01% v.E./°C (Tu)**  
**Alarm output relay 1 NO contact**  
**250 V AC / 30 V DC @ 2A safe zone**  
**32 V AC @ 0.5 A/ 32 VDC @ 1 A Zone 2**  
**Auxiliary power 19... 31.2 V DC**  
**Power consumption 3 W**  
**Ambient temperature range -20 to +50°C**

Creation date February 28, 2023 / 70049051001

Catalogue status 18.02.2023 / Weidmüller reserves the right to make technical changes.

**ACT20X-2HAI-2SAO-S****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

**Approvals**

Approvals



Approvals	DNVGL;
ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">Certification SIL</a> <a href="#">Certification DNV GL</a> <a href="#">Certification ATEX</a> <a href="#">Certification IECEx</a> <a href="#">Certification UL</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">WSCAD</a>
Software	<a href="#">Library and function block – WI-Manager, DTM-Library for online installation</a> <a href="#">Release notes for Weidmueller FDT-DTM Software version</a>
User Documentation	<a href="#">Instruction sheet</a> <a href="#">Safety Manual for SIL application</a> <a href="#">Handbuch ACT20X- Serie, deutsch</a> <a href="#">Manual ACT20X- series, english</a> <a href="#">20210120 Security Advisory - WI-Manager affected by MundM Software fdtCONTAINER vulnerability</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	


**ACT20X-2HAI-2SAO-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klängenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**


**Application**

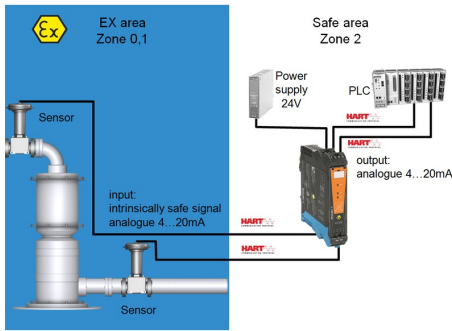


**Block diagram**

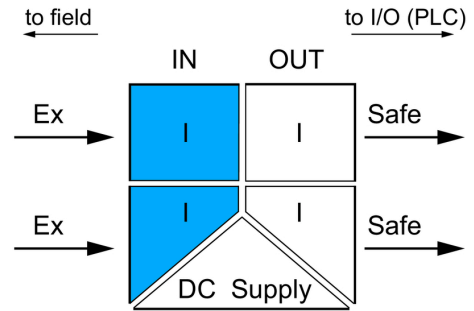


**Dimensioned drawing**

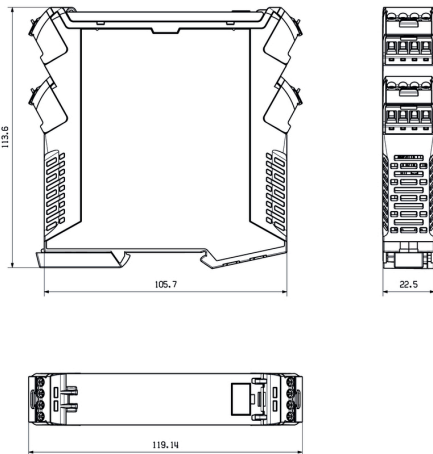

**Wiring example**

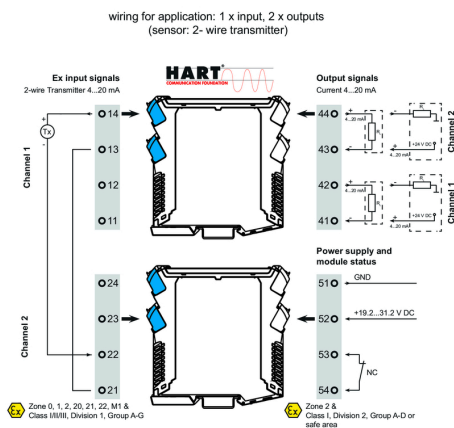

**Wiring example**


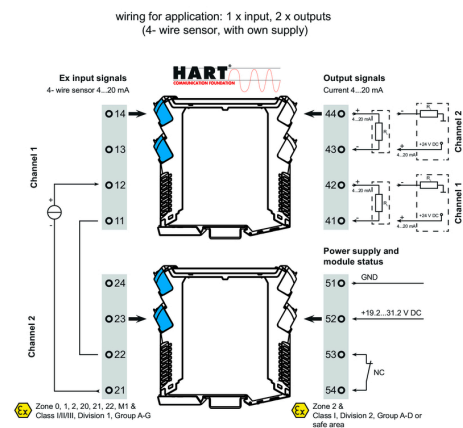


**ACT20X-2HAI-2SAO-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klängenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

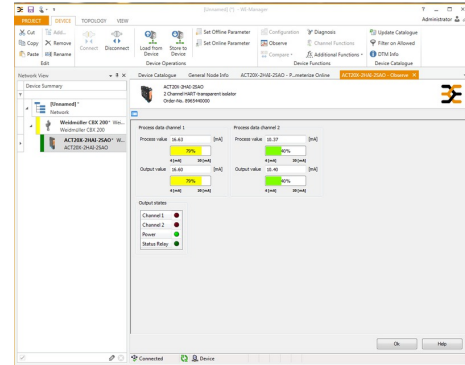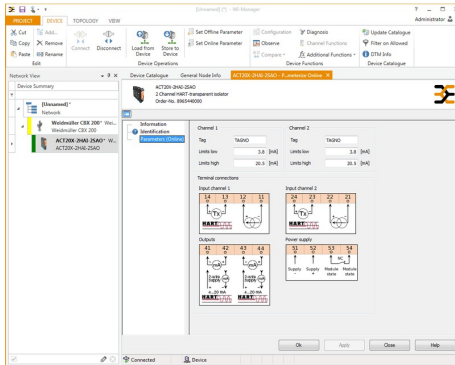

screenshot of configuration with FDT2 /DTM software

screenshot of "observe" with FDT2 / DTM software

**Connection diagram**

