


L-Shaped Angles

Milled Surfaces, Outside Corner Perpendicular Rough, Dimension Configurable

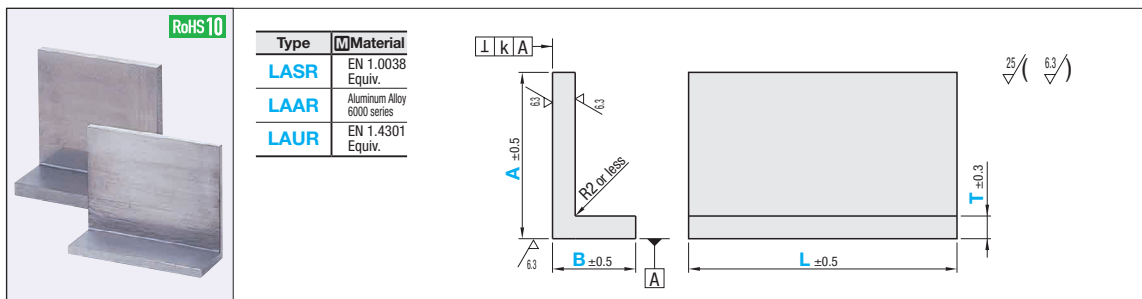

T Dimension	Long sides of A and B dims.	Perpendicularity k
5,6	20-75	0.2
8	50-75	0.35
10	25-75	0.2
	76-100	0.3
	101-125	0.35

Part Number Type	T	A	B	L	Unit Price						
					Min. L - 50	L51-100	L101-150	L151-200	L201-250	L251-300	
LASR (EN 1.0038 Equiv.)	5	25-50	25-50	25-300							
		51-75									
		76-100									
	10	25-50	30-50								
		51-75									
		76-100	51-75								
		101-125									
		76-100			76-100						
		101-125									
	101-125	101-125									

Part Number Type	T	A	B	L	Unit Price							
					Min. L - 50	L51-100	L101-150	L151-200	L201-250	L251-300		
LAAR (Aluminum Alloy 6000 series)	5	20-50	20-50	25-300								
		51-75			51-75							
		51-75										
	6	30-50	30-50									
		51-75										
		50			30-50							
	51-75	51-75										
	76-100											
	10	51-75	51-75									
		76-100			76-100							
		76-100										

Part Number Type	T	A	B	L	Unit Price						
					Min. L - 50	L51-100	L101-150	L151-200	L201-250	L251-300	
Laur (EN 1.4301 Equiv.)	5	20-60	25-50	25-300							
	6	60-75	25-50								
		51-75	51-75								
	8	50	50								


Ordering Example: Part Number - A - B - L
LASR10 - A100 - B100 - L300

Alterations: Part Number - A - B - L - (CKC, CCA, CCB-etc.)
LASR10 - A100 - B50 - L50 - CKC

Alterations	Corner Cut	Side perpendicularity guaranteed
Code	CCA, CCB, CCC, CCD	CKC
Spec.	Any corner can be cut. 1≤ Corner Cut ≤30: 1mm Increment [Ordering Code] (Ex.) When A and D are cut with C5→CCA5-CCD5	Both sides of dimension L are machined to be perpendicular to surface A. [Ordering Code] CKC

L-Shaped Angles

Milled, Inside Unmilled, Outside Corner Perpendicular, Dimension Configurable

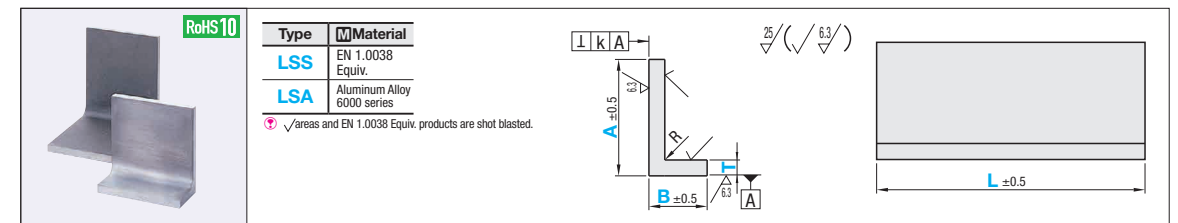

Part Number Type	T	T Tolerance	1mm Increment		
			A	B	L
LSS	5	±0.5	25-75	25-75	25-300
	6		25-125	25-125	
	10		101-150	101-150	
	15		151-175	151-175	
LSA	5	±0.5	25-75	25-75	25-300
	6		25-125	25-125	
	12		101-125	101-125	51-300

Long sides of A and B dims.	Perpendicularity k	Long sides of A and B dims.	T	R	
				LSS	LSA
25-80	0.05 or Less	25-60	5	8.5-10	1 or Less
81-150	0.10 or Less	61-75	6		
151-175	0.15 or Less	25-50	10	10-14	2 or Less
		51-75			
		25-60	12		
		61-150	15	16-18	

Part Number	A	B	Unit Price																			
			LSS5, LSS6				LSS10				LSS12				LSS15							
			L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300		
LSS5 LSS6 LSS10 LSS12 LSS15	25-50	25-50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	25-50	51-75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	101-125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	25-50	76-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	126-150		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125	101-125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	126-150		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	151-175		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Part Number	A	B	Unit Price																			
			LSA5, LSA6				LSA10				LSA12				LSA15							
			L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300	L25-50	L51-100	L101-150	L151-200	L201-250	L251-300		
LSA5 LSA6 LSA10 LSA12	25-50	25-50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	25-50	51-75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	25-50	76-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	51-75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	76-100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	126-150		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	101-125	101-125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	126-150		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	151-175		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Ordering Example: Part Number - A - B - L
LSS5 - A25 - B25 - L100

Alterations: Part Number - A - B - L - (CKC, CCA, CCB-etc.)
LSS10 - A100 - B50 - L50 - CKC

Alterations	Corner Cut	Side perpendicularity guaranteed
Code	CCA, CCB, CCC, CCD	CKC
Spec.	Any corner can be cut. 1≤ Corner Cut ≤30: 1mm Increment [Ordering Code] (Ex.) When A and D are cut with C5→CCA5-CCD5	Both sides of dimension L are machined to be perpendicular to surface A. [Ordering Code] CKC