

FAG



★ 1308-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389035550030Self-aligning ball bearing 13..-K-TVH,
tapered bore taper 1:12, plastic cage

★ Preferred product

Technical information

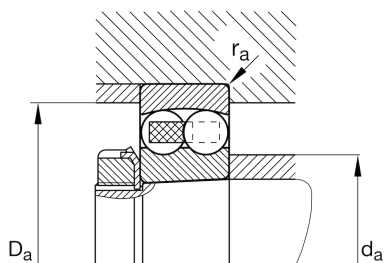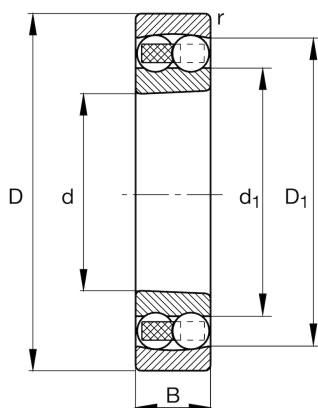

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.
	0,704 kg	Weight

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
r_{\min}	1,5 mm	Minimum chamfer dimension
C_r	30.000 N	Basic dynamic load rating, radial
C_{0r}	9.700 N	Basic static load rating, radial
C_{ur}	610 N	Fatigue load limit, radial
n_G	8.600 1/min	Limiting speed
n_{gr}	7.200 1/min	Reference speed

Dimensions

D_1	74,7 mm	Shoulder diameter outer ring
d_1	57,8 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a \min}$	49 mm	Minimum diameter shaft shoulder
$d_{a \max}$	55 mm	Maximum diameter shaft shoulder
$D_{a \max}$	81 mm	Maximum diameter of housing shoulder
$d_{b \min}$	44 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

Calculation factors

e	0,25	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
	H308	Adapter sleeve
Y ₁	2,51	Dynamic axial load factor
Y ₂	3,88	Dynamic axial load factor
Y ₀	2,63	Static axial load factor