

FAG



★ 2211-TVH

Self-aligning ball bearing

Schaeffler ID:
0167030140000Self-aligning ball bearing 22...-TVH, plastic
cage

★ Preferred product

Technical information

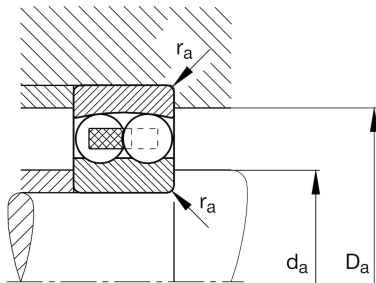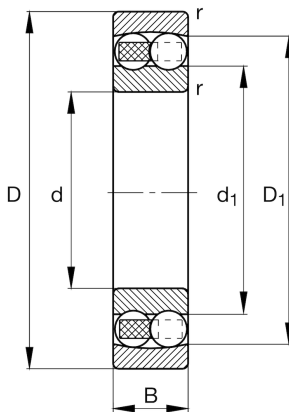

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.
	0,744 kg	Weight

Main Dimensions & Performance Data

d	55 mm	Bore diameter
D	100 mm	Outside diameter
B	25 mm	Width
r_{min}	1,5 mm	Minimum chamfer dimension
C_r	39.000 N	Basic dynamic load rating, radial
C_{0r}	12.500 N	Basic static load rating, radial
C_{ur}	790 N	Fatigue load limit, radial
n_G	7.000 1/min	Limiting speed
n_{gr}	6.700 1/min	Reference speed

Dimensions

D_1	89,8 mm	Shoulder diameter outer ring
d_1	69,6 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	64 mm	Minimum diameter shaft shoulder
$D_{a max}$	91 mm	Maximum diameter of housing shoulder
$r_{a max}$	1,5 mm	Maximum fillet radius

Calculation factors

e	0,22	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,91	Dynamic axial load factor
Y_2	4,51	Dynamic axial load factor
Y_0	3,05	Static axial load factor