
**FAG**
**★ 2211-K-2RS-TVH-C3**


Self-aligning ball bearing

 Schaeffler ID:  
0384725970030

 Self-aligning ball bearing 22..-K-2RS-TVH,  
tapered bore taper 1:12, seals, plastic  
cage

**★ Preferred product**

## Technical information

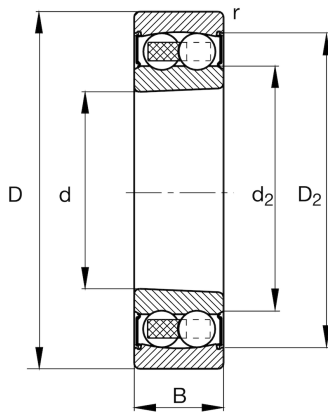
**Temperature range**

$T_{\min}$	-20 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.
	0,792 kg	Weight

**Main Dimensions & Performance Data**


d	55 mm	Bore diameter
D	100 mm	Outside diameter
B	25 mm	Width
$r_{\min}$	1,5 mm	Minimum chamfer dimension
$C_r$	27.000 N	Basic dynamic load rating, radial
$C_{0r}$	10.000 N	Basic static load rating, radial
$C_{ur}$	630 N	Fatigue load limit, radial
$n_G$	3.850 1/min	Limiting speed

**Dimensions**

$D_2$	88,2 mm	Caliber diameter outer ring
$d_2$	68 mm	Caliber diameter inner ring

**Mounting dimensions**

$d_{a \min}$	64 mm	Minimum diameter shaft shoulder
$d_{a \max}$	69 mm	Maximum diameter shaft shoulder
$D_{a \max}$	91 mm	Maximum diameter of housing shoulder
$d_{b \min}$	60 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	6 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

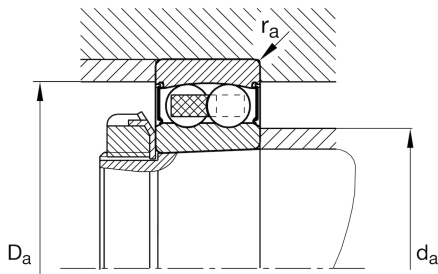

**Calculation factors**

e	0,19	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
	H311	Adapter sleeve
Y <sub>1</sub>	3,32	Dynamic axial load factor
Y <sub>2</sub>	5,15	Dynamic axial load factor
Y <sub>0</sub>	3,48	Static axial load factor