

FAG

★ 23120-E1-XL-K-TVPB

Spherical roller bearing


Schaeffler ID:
0190065860000

★ Preferred product

X-life

Spherical roller bearings 231...E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

Technical information

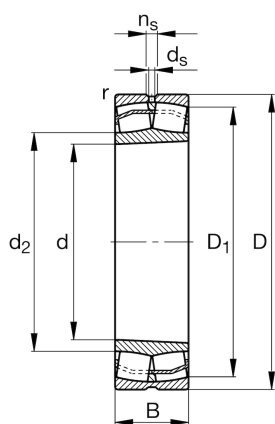

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.
	4,055 kg	Weight

Main Dimensions & Performance Data


d	100 mm	Bore diameter
D	165 mm	Outside diameter
B	52 mm	Width
C_r	450.000 N	Basic dynamic load rating, radial
C_{0r}	570.000 N	Basic static load rating, radial
C_{ur}	54.000 N	Fatigue load limit, radial
n_G	4.000 1/min	Limiting speed
n_{gr}	2.750 1/min	Reference speed

Dimensions

r_{\min}	2 mm	Minimum chamfer dimension
D_1	146,3 mm	Bore diameter outer ring
d_2	113,9 mm	Raceway diameter of the inner ring
d_s	3,2 mm	Diameter lubrication hole
n_s	6,5 mm	Width of lubricating groove

Mounting dimensions

$d_{a \min}$	111 mm	Minimum diameter shaft shoulder
$D_{a \max}$	154 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2 mm	Maximum recess radius
$B_{a \min}$	7 mm	Minimum cavity width of the sleeve
$d_{a \max}$	113 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	107 mm	Minimum cavity diameter of the sleeve

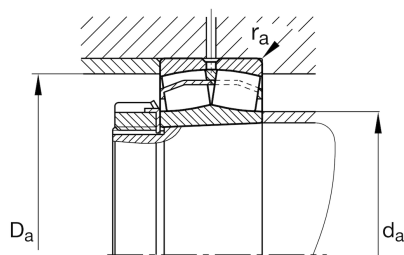

Additional information

	H3120	Adapter sleeve
e	0,28	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	2,37	Dynamic axial load factor
	AHX3120	Withdrawal sleeve
Y ₂	3,53	Dynamic axial load factor
Y ₀	2,32	Static axial load factor