



FAG

KLM48548-LM48510

Tapered roller bearing

Schaeffler ID:
0167317940000Tapered roller bearing K-SERIES, single
row

Technical information

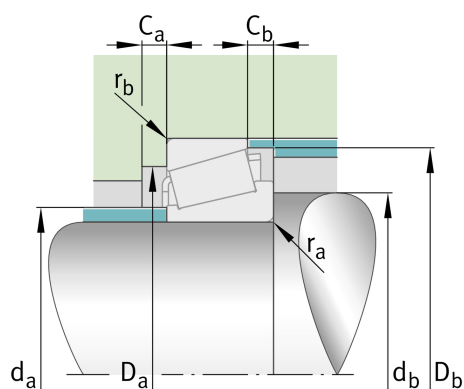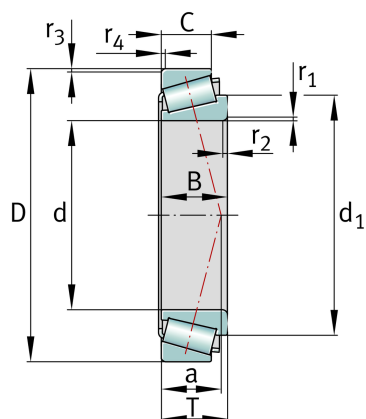

Main Dimensions & Performance Data

d	34,925 mm	Bore diameter
D	65,088 mm	Outside diameter
B	18,288 mm	Width, inner ring
C	13,97 mm	Width, outer ring
T	18,034 mm	Width, total
C_r	46.500 N	Basic dynamic load rating, radial
C_{0r}	56.000 N	Basic static load rating, radial
C_{ur}	6.600 N	Fatigue load limit, radial
n_G	11.500 1/min	Limiting speed
	0,257 kg	Weight

Dimensions

$r_{1,2 \text{ min}}$	3,6 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	1,3 mm	Minimum chamfer dimension of outer ring back face
a	14 mm	Distance between the apexes of the pressure cones
d_1	49,7 mm	Guidance rib diameter of inner ring

Mounting dimensions

$d_{a \text{ max}}$	41,5 mm	Maximum diameter of shaft shoulder
$d_{b \text{ min}}$	48 mm	Minimum diameter of shaft shoulder
$D_{a \text{ min}}$	58 mm	Minimum diameter of housing shoulder
$D_{a \text{ max}}$	59 mm	Maximum diameter of housing shoulder
$D_{b \text{ min}}$	61 mm	Minimum diameter of housing shoulder
$C_{a \text{ min}}$	3 mm	Minimum axial space
$C_{b \text{ min}}$	4 mm	Minimum axial space
$r_{a \text{ max}}$	3,6 mm	Maximum fillet radius of shaft
$r_{b \text{ max}}$	1,3 mm	Maximum fillet radius of housing

Calculation factors

e	0,38	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,59	Dynamic axial load factor
Y ₀	0,88	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.