





FAG

KLM806649-LM806610

Tapered roller bearing

Schaeffler ID:
0382796650000Tapered roller bearing K-SERIES, single
row

Technical information

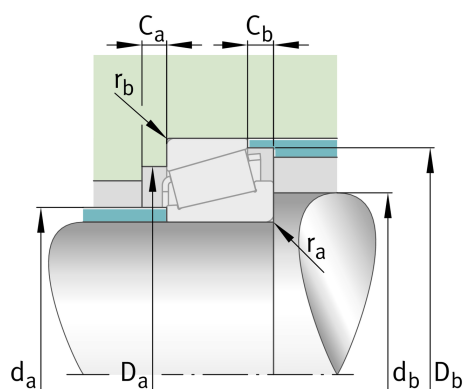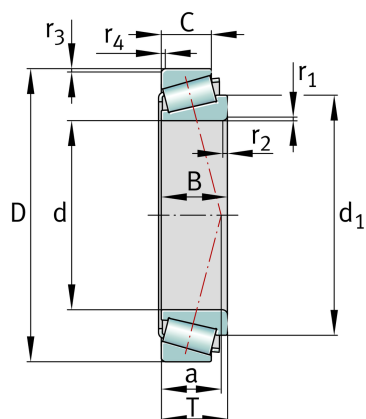

Main Dimensions & Performance Data

d	53,975 mm	Bore diameter
D	88,9 mm	Outside diameter
B	19,05 mm	Width, inner ring
C	13,492 mm	Width, outer ring
T	19,05 mm	Width, total
C_r	59.000 N	Basic dynamic load rating, radial
C_{0r}	78.000 N	Basic static load rating, radial
C_{ur}	9.700 N	Fatigue load limit, radial
n_G	8.000 1/min	Limiting speed
	0,004 kg	Weight

Dimensions

$r_{1,2 \text{ min}}$	2,3 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	2 mm	Minimum chamfer dimension of outer ring back face
a	22 mm	Distance between the apexes of the pressure cones
d_1	72,3 mm	Guidance rib diameter of inner ring

Mounting dimensions

$d_{a \text{ max}}$	60 mm	Maximum diameter of shaft shoulder
$d_{b \text{ min}}$	63 mm	Minimum diameter of shaft shoulder
$D_{a \text{ min}}$	80 mm	Minimum diameter of housing shoulder
$D_{b \text{ min}}$	85 mm	Minimum diameter of housing shoulder
$C_{a \text{ min}}$	4 mm	Minimum axial space
$C_{b \text{ min}}$	5,5 mm	Minimum axial space
$r_{a \text{ max}}$	2,3 mm	Maximum fillet radius of shaft
$r_{b \text{ max}}$	2 mm	Maximum fillet radius of housing

Calculation factors

e	0,55	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,1	Dynamic axial load factor
Y ₀	0,6	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.