



FAG

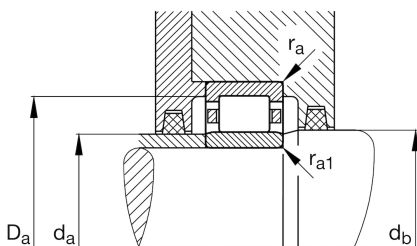
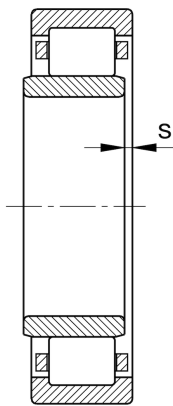
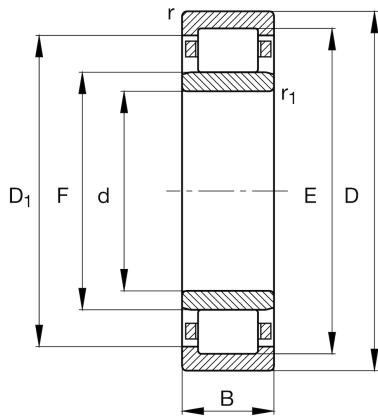
NU1064-M1

Cylindrical roller bearing

Schaeffler ID:
0167374820000

Cylindrical roller bearing NU.-M1, with cage, single row, non-locating bearing, 2 ribs on outer ring, 0 ribs on inner ring (smooth), type NU

Technical information

**Temperature range**

T_{min}	-30 °C	Operating temperature min.
T_{max}	150 °C	Operating temperature max.
	46,1 kg	Weight

Main Dimensions & Performance Data

d	320 mm	Bore diameter
D	480 mm	Outside diameter
B	74 mm	Width
C_r	910.000 N	Basic dynamic load rating, radial
C_{0r}	1.490.000 N	Basic static load rating, radial
C_{ur}	125.000 N	Fatigue load limit, radial
n_G	2.200 1/min	Limiting speed
n_{gr}	1.300 1/min	Reference speed

Dimensions

r_{min}	4 mm	Minimum chamfer dimension
$r_{1 min}$	4 mm	Minimum chamfer dimension
s	11,5 mm	Axial displacement
E	440 mm	Raceway diameter outer ring
F	360 mm	Raceway diameter inner ring
$D_{1 min}$	425,1 mm	Minimum rib diameter outer ring

Mounting dimensions

$d_{a min}$	335 mm	Minimum diameter shaft shoulder
$d_{a max}$	356 mm	Maximum diameter of shaft shoulder
$d_{b min}$	365 mm	Minimum shaft shoulder
$D_{a max}$	465 mm	Maximum diameter of housing shoulder
$r_{a max}$	3 mm	Maximum recess radius
$r_{a1 max}$	3 mm	Maximum recess radius