

FAG



★ 1207-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389029400030Self-aligning ball bearing 12..-K-TVH,
tapered bore taper 1:12, plastic cage

★ Preferred product

Technical information

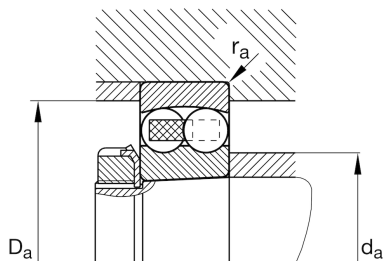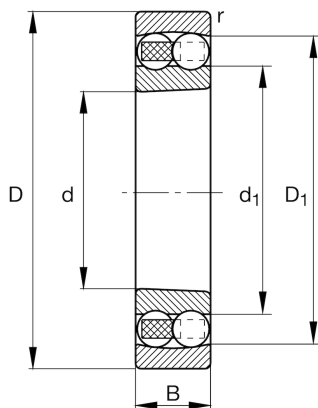

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.
	0,315 kg	Weight

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	72 mm	Outside diameter
B	17 mm	Width
r_{min}	1,1 mm	Minimum chamfer dimension
C_r	16.000 N	Basic dynamic load rating, radial
C_{0r}	5.100 N	Basic static load rating, radial
C_{ur}	325 N	Fatigue load limit, radial
n_G	11.600 1/min	Limiting speed
n_{gr}	9.800 1/min	Reference speed

Dimensions

D_1	59,1 mm	Shoulder diameter outer ring
d_1	47,7 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	42 mm	Minimum diameter shaft shoulder
$d_{a max}$	45 mm	Maximum diameter shaft shoulder
$D_{a max}$	65 mm	Maximum diameter of housing shoulder
$d_{b min}$	38 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	5 mm	Minimum cavity width of the sleeve
$r_{a max}$	1 mm	Maximum fillet radius

Calculation factors

e	0,22	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
	H207	Adapter sleeve
Y ₁	2,81	Dynamic axial load factor
Y ₂	4,35	Dynamic axial load factor
Y ₀	2,94	Static axial load factor