
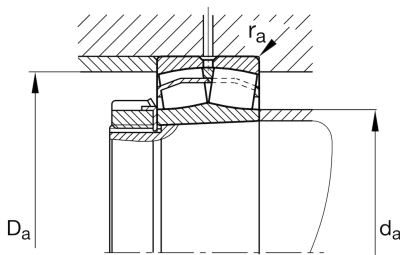


## Technical information

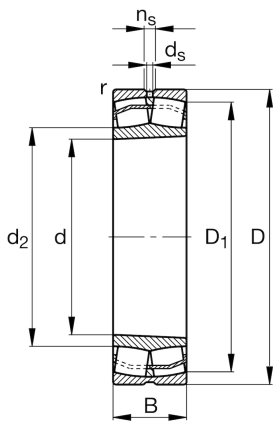

## 22338-BE-XL-K-JPA-T41A

### Spherical roller bearing

Schaeffler ID:  
0645844700000

Spherical roller bearings 223..-E1-K-T41A,  
For oscillating load with restricted diameter  
tolerances, with tapered bore

### Main Dimensions & Performance Data

d	190 mm	Bore diameter
D	400 mm	Outside diameter
B	132 mm	Width
$C_r$	2.220.000 N	Basic dynamic load rating, radial
$C_{0r}$	2.650.000 N	Basic static load rating, radial
$C_{ur}$	213.000 N	Fatigue load limit, radial
$n_G$	1.940 1/min	Limiting speed
$n_{gr}$	1.160 1/min	Reference speed
	77,845 kg	Weight

### Additional information

	H2338	Adapter sleeve
$r_{min}$	5 mm	Minimum chamfer dimension
$D_1$	338,1 mm	Bore diameter outer ring
	AH2338G	Withdrawal sleeve
$d_2$	236,8 mm	Raceway diameter of the inner ring
$d_s$	12,5 mm	Diameter lubrication hole
$n_s$	23,5 mm	Width of lubricating groove

### Mounting dimensions

$d_{a min}$	210 mm	Minimum diameter shaft shoulder
$d_{a max}$	228 mm	Maximum diameter of shaft shoulder
$D_{a max}$	380 mm	Maximum diameter of housing shoulder
$r_{a max}$	4 mm	Maximum recess radius
$d_{b min}$	206 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	9 mm	Minimum cavity width of the sleeve

**Calculation factors**

e	0,34	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y <sub>1</sub>	1,96	Dynamic axial load factor
Y <sub>2</sub>	2,92	Dynamic axial load factor
Y <sub>0</sub>	1,92	Static axial load factor

**Temperature range**

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	200 °C	Operating temperature max.