

## ACT20M-CI-CO-ILP-S

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image, Similar to illustration



#### ACT20M: The slim solution

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

#### General ordering data

Version	Passive isolator, Input current loop feed, 1-channel, Input : 0(4)-20 mA, Output : 0(4)-20 mA
Order No.	<a href="#">1176070000</a>
Type	ACT20M-CI-CO-ILP-S
GTIN (EAN)	4032248970148
Qty.	1 pc(s).

Creation date March 1, 2023 3:28:54 PM CET

Catalogue status 18.02.2023 / We reserve the right to make technical changes.

## ACT20M-CI-CO-ILP-S

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	114.3 mm	Depth (inches)	4.5 inch
Height	112.5 mm	Height (inches)	4.429 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	80 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...70 °C
Operating temperature, min.	-25 °C	Operating temperature, max.	70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

### Probability of failure

SIL in compliance with IEC 61508	None	MTBF	699 Years
----------------------------------	------	------	-----------

### Input

Input current	0...20 mA, 4...20mA	Input frequency	100 Hz
Number of inputs	1	Sensor	Current source
Voltage drop, current input	1.25 V + 0.015 V <sub>out</sub> @25°C		

### Output

Cut-off frequency (-3 dB)	100 Hz	Load impedance current	≤ 600 Ω, @ max 23mA
Number of outputs	1	Output current	0...20 mA, 4...20 mA
Type	active, connected control must be passive		

### General data

Accuracy	< 0.1 % of measuring range	Configuration	none
Galvanic isolation	2-way isolator	Long-term drift	0
Power consumption	30 mW	Rail	TS 35
Step response time	≤ 5 ms	Temperature coefficient	≤ 0.01 % / °C
Type of connection	Screw connection	Voltage supply	Loop powered, via 4...20 mA input

### Insulation coordination

EMC standards	IEC 61326-1, NE 21	Galvanic isolation	2-way isolator
Insulation voltage	2.5 kV <sub>eff</sub> / 1 min.	Pollution severity	2
Rated voltage	300 V <sub>eff</sub>	Surge voltage category	II

### Data for Ex applications (ATEX)

Installation location	Device installed in safe area, zone 2	Marking	II 3 G Ex nA IIC T4 Gc
-----------------------	--	---------	------------------------

## ACT20M-CI-CO-ILP-S

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

### EMC conformity and approvals

EMC standards	IEC 61326-1, NE 21	Standards	IEC 61010-1
---------------	--------------------	-----------	-------------

### Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-20	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20	ECLASS 12.0	27-21-01-20

### Tender specification sheets

Long specification	Short specification	<b>Standard signal passive isolator 1-channel signal passive isolator in 6.1 mm width with input current loop feed, for transmitting and isolating analogue DC current signals from 0/4 to 20 mA</b>
<b>Type ACT20M-CI-CO-ILP-S</b>		

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

### Important note

Product information	The ACT20M-CI-CO-ILP-S passive isolator isolates standard analogue current signals. An analogue input current signal is linearly converted to an analogue output current signal and is galvanically isolated. Power is supplied through the input measuring circuit (input loop-powered).
---------------------	---

## ACT20M-CI-CO-ILP-S

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

# Technical data

### Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">DNV-GL certificate</a> <a href="#">FM certificate</a> <a href="#">IECEX certificate</a> <a href="#">ATEX certificate</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	


**ACT20M-CI-CO-ILP-S**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Connection diagram**

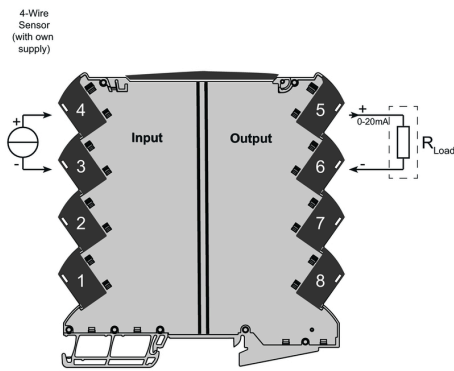

**Dimensional drawing**

