

## VPU I 3+1 R 400V/25KA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



### Type I/II lightning arrester for use in 400/690 V mains systems

- Can also be used as Type II surge protection
- With remote monitoring function, one changeover contact
- Tested according to IEC 61643-11 for Type I and II surge protection
- Pluggable arrester

### General ordering data

Version	Surge voltage arrester, Low voltage, with remote contact, TN-C-S, TN-S, IT with N, IT without N, TT
Order No.	<a href="#">1351880000</a>
Type	VPU I 3+1 R 400V/25KA
GTIN (EAN)	4050118158311
Qty.	1 pc(s).
Replacement parts	<a href="#">1351790000</a> <a href="#">1351990000</a> <a href="#">1402570000</a>

Creation date February 28, 2023 4:22:15 PM CET

Catalogue status 18.02.2023 / We reserve the right to make technical changes.

## VPU I 3+1 R 400V/25KA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	69 mm	Depth (inches)	2.717 inch
Height	106 mm	Height (inches)	4.173 inch
Width	142.4 mm	Width (inches)	5.606 inch
Mounting dimension - height	75 mm	Net weight	1,384 g

### Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-40 °C...70 °C
Operating temperature, min.	-40 °C	Operating temperature, max.	70 °C
Humidity	5 - 95% rel. humidity		

### Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm <sup>2</sup>
Cross-section for connected wire, solid core, min.	0.14 mm <sup>2</sup>	Stripping length	8 mm

### General data

Colour	black, orange, blue	Design	Installation housing; 8 TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20	Rail	TS 35
Segment	Power distribution	UL 94 flammability rating	V-0
Version	with remote contact		

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	IV
--------------------	---	------------------------	----

### Rated data IEC / EN

Discharge current $I_{max}$ (8/20 $\mu$ s) wire-PE	100 kA	Discharge current $I_{max}$ (8/20 $\mu$ s) N-PE	100 kA
Discharge current $I_n$ (8/20 $\mu$ s) N-PE	100 kA	Discharge current $I_n$ (8/20 $\mu$ s) wire-PE	25 kA
Energy coordination (≤10 m)	Type I, Type II, Type III	Follow-on current extinguishing capability $I_{fi}$	Not available due for technical reasons
Fuse	No Fuse necessary ≤250 A gG, 250 A gL (if back up fuse > 250 A)	Leakage current at $U_n$	100 $\mu$ A
Lightning test current $I_{imp}$ (10/350 $\mu$ s) (L-PE)	25 kA	Lightning test current, $I_{imp}$ (10/350 $\mu$ s) (N-PE)	100 kA
Low voltage network	TN-C-S, TN-S, IT with N, IT without N, TT	Mains voltage	230 V / 400 V, 400 V / 690 V
Max. continuous voltage, $U_c$ (AC)	400 V	Max. continuous voltage, $U_c$ (N-PE)	440 V
Number of poles	4	Protection level $U_p$ at $I_N$ (L/N-PE)	≤ 1.9 kV
Protection level $U_p$ at $I_N$ (N-PE)	≤ 3 kV	Rated load current $I_L$	125 A
Rated voltage (AC)	400 V	Requirements category acc. to IEC 61643-11	Type I, Type II
Requirements class, acc. to EN 61643-11	T1, T2	Response time	≤ 25 ns, ≤ 100 ns
Short-circuit current rating $I_{SCCR}$	25 kA	Signalling contact	250 V 1A 1CO
Standards	IEC61643-11, EN61643-11	Temporary surge voltage (over-voltage) - TOV	620 V
Voltage type	AC		

Creation date February 28, 2023 4:22:15 PM CET

## VPU I 3+1 R 400V/25KA

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Connection data

Stripping length	15 mm	Type of connection	Screw connection
Stripping length, rated connection	15 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	3 Nm	Clamping range, rated connection	16 mm <sup>2</sup>
Clamping range, min.	4 mm <sup>2</sup>	Clamping range, max.	35 mm <sup>2</sup>
Wire cross-section, solid, min.	2.5 mm <sup>2</sup>	Wire cross-section, solid, max.	16 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	2.5 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	25 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	2.5 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	50 mm <sup>2</sup>
Connection cross-section, stranded, min.	2.5 mm <sup>2</sup>	Connection cross-section, stranded, max.	50 mm <sup>2</sup>

### Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

## VPU I 3+1 R 400V/25KA

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Tender specification sheets

Long specification	Multi-pin lightning arrester according to the requirements of Class I in accordance with IEC 61643-11, EN61643-11:2013. On interface transition from 0 to 1 (acc. to IEC 1312-1), the arrester serves as lightning protection providing equipotential bonding and is used in applications in accordance with IEC 61643-12. The use of a non-blow-out sparkover gap, in combination with a high-power varistor, satisfies the inspection requirements for Class I surge protection systems in accordance with the VDEW (Association of German Power Stations) directive. The arrester is installed in the vicinity of the power supply for the equipment that needs protection, in a standard installation/electrical distribution enclosure. The VPU I 3+1 R 400 V/25 kA is used in the TN-C and TN-C mains network. With thermal separation device on the varistor. If protection is no longer available, the colour in the display window changes from green to red. The functional state is also displayed by a voltage-free signalling contact (changeover). Rated voltage: 400 VAC lightning test current (10/350 µs): 25 kA protection level with lightning test current < 1.9 kV 25 kA short-circuit withstand rating with max. back-up fuse of 250 A gl telecommunication output: contact: 250 V/0.5 A 48 VDC/0.1 A, type: Weidmüller VPU I 3+1 R 400 V/25 kA, Order No. 1351880000 or equivalent	Short specification
		Class I arrester for LPL 1 with 25 kA suitable for 400/690 V TN-CS, TT mains systems. Protection level < 1.9 kV. With remote alert Type: Weidmüller VPU I 3+1 R 400 V/25 kA Order no. 1351880000 or equivalent

## VPU I 3+1 R 400V/25KA

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Technical data

### Approvals

Approvals



ROHS

Conform

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">EAC VPU SERIES</a> <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">WSCAD</a>
User Documentation	<a href="#">Beipackzettel / Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


VPU I 3+1 R 400V/25KA

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

Drawings

Electric symbol

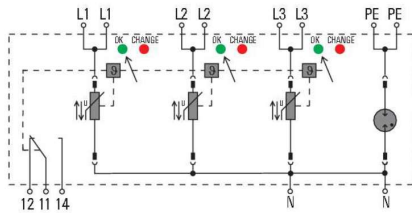

Schematic circuit diagram