

TS 35X15/2.3 2M/AL/BK

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Product image



Similar to illustration

Aluminum has the second best electrical conductivity after copper. One advantage is low weight, anMiscellaneous is outstanding corrosion protection.

General ordering data

Version	Rail, TS 35, TS 35 x 15, without slot, Aluminium, untreated
Order No.	1848290000
Type	TS 35X15/2.3 2M/AL/BK
GTIN (EAN)	4032248385614
Qty.	2 m

TS 35X15/2.3 2M/AL/BK

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com
www.weidmueller.com

Technical data

Dimensions and weights

Depth	15 mm	Depth (inches)	0.591 inch
Height	35 mm	Height (inches)	1.378 inch
Width	2,000 mm	Width (inches)	78.74 inch
Net weight	330 g		

Mounting rail

Installation advice	Direct mounting		
Length of the terminal rail	min.	0 mm	
	max.	2,000 mm	
	nominal	2,000 mm	
Material	Aluminium		
Permitted thermal current for PEN function, max.	232 A		
Pre-punched mounting rail	No		
Short circuit strength corresponds to E-Cu wire	95 mm ²		
Short-time withstand current according to IEC 60947-7-2	11.4 kA/1s		
Slit gap			
Slit length			
Slit width			
Standards	DIN EN 60715		
Surface finish	untreated		
Thickness	2.3 mm		

Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ECLASS 9.0	27-40-06-02
ECLASS 9.1	27-40-06-02	ECLASS 10.0	27-40-06-02
ECLASS 11.0	27-40-06-02	ECLASS 12.0	27-40-06-02

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	CAD data – STEP
Engineering Data	WSCAD, Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

TS 35X15/2.3 2M/AL/BK**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

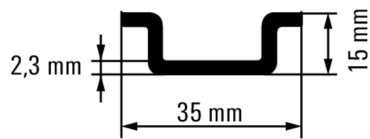
32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings**Product image**

Similar to illustration