

**SAI-4-M 5P M12 ECO UT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



M12 distributors are available in various versions. The 4, 6 or 8 M12 slots are in 4 or 5 pole design. The group outlet is designed as a fixed cable version, hood version for connection by the user, or with M23. Special versions are also available. For instance, there are 1-to-1 distributors for use with any connection types, or distributors approved for Ex Zone 1.

**General ordering data**

|            |   |
|------------|---|
| Version    | Sensor-actuator passive distributor, M12, Hood version, Yes |
| Order No.  | <a href="#">1892101000</a>                                  |
| Type       | SAI-4-M 5P M12 ECO UT                                       |
| GTIN (EAN) | 4032248743803   |
| Qty.       | 2 pc(s).  |

Creation date March 16, 2023 5:53:24 PM CET

Catalogue status 03.03.2023 / We reserve the right to make technical changes.

## SAI-4-M 5P M12 ECO UT

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                |            |
|------------|---------|----------------|------------|
| Depth      | 102 mm  | Depth (inches) | 4.016 inch |
| Net weight | 103.5 g |                |            |

## Temperatures

|                             |            |                             |        |
|-----------------------------|------------|-----------------------------|--------|
| Operating temperature       | -20 - 90°C | Operating temperature, min. | -20 °C |
| Operating temperature, max. | 90 °C      |                             |        |

## Connection data

|                      |                      |                      |                     |
|----------------------|----------------------|----------------------|---------------------|
| Clamping range, min. | 0.08 mm <sup>2</sup> | Clamping range, max. | 1.5 mm <sup>2</sup> |
| Storage space        | Standard             | Distributor outlet   | Hood version        |
| Connection type PE   | Screw connection     |                      |                     |

## Electrical data

|                                |      |   |                   |
|--------------------------------|------|---|-------------------|
| Rated voltage, min.            | 10 V | Rated voltage, max.                     | 30 V              |
| Test voltage                   | 1 kV | Max. current-carrying capacity per slot | 4 A               |
| Total current                  | 10 A | Current per signal                      | 2 A               |
| Electrical isolation available | Yes  | Insulation strength                     | 10 <sup>9</sup> Ω |

## General technical data

|                                     |       |                             |        |
|-------------------------------------|-------|-----------------------------|--------|
| Plug-in station coding              | A     | Protection degree           | IP68   |
| Number of poles                     | 5     | Number of contact sockets   | 4      |
| Connection thread                   | M12   | Pollution severity          | 3      |
| Fire behaviour                      | V-0   | Plugging cycles             | ≤ 50   |
| LED                                 | Yes   | LED initiator               | Yes    |
| LED colour for indicating operation | green | LED colour for I/O function | yellow |

## Material data

|                       |                |                          |                |
|-----------------------|----------------|--------------------------|----------------|
| Housing main material | Pocan          | Material of distributor  | Plastic        |
| Housing colour        | grey, RAL 7032 | Hood sealing material    | Viton          |
| Screw socket          | Pocan          | Contact material         | CuZn           |
| Contact surface       | Gold-plated    | Contact carrier material | PBT (UL 94 V0) |

## Technical data cable

|                 |   |                             |    |
|-----------------|---|-----------------------------|----|
| Number of poles | 5 | Suitable for cable carriers | No |
|-----------------|---|-----------------------------|----|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002585    | ETIM 7.0    | EC003558    |
| ETIM 8.0    | EC003558    | ECLASS 9.0  | 27-44-01-08 |
| ECLASS 9.1  | 27-44-01-08 | ECLASS 10.0 | 27-44-01-11 |
| ECLASS 11.0 | 27-44-01-11 | ECLASS 12.0 | 27-44-01-11 |

## Environmental Product Compliance

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

**Data sheet****SAI-4-M 5P M12 ECO UT**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Approvals**

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E141197    |

**Downloads**

|                  |  |
|------------------|--|
| Engineering Data | <a href="#">CAD data – STEP</a>  |
| Engineering Data | <a href="#">WSCAD</a>  |
| Catalogues       | <a href="#">Catalogues in PDF-format</a>                               |
| Brochures        | <a href="#">FL FIELDWIRING EN</a><br><a href="#">FL FIELDWIRING EN</a> |


SAI-4-M 5P M12 ECO UT

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

Drawings

www.weidmueller.com

Dimensioned drawing

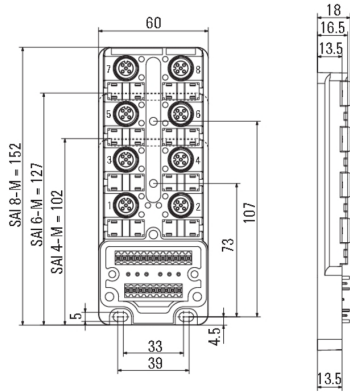

Wiring diagram

