

AAP11 6/6X1.5 LO-LI BL**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

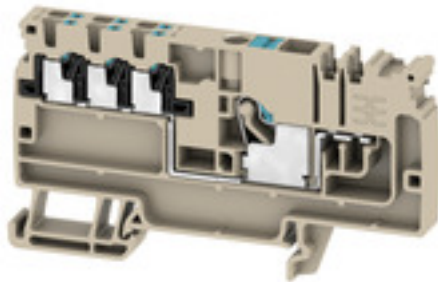
32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Product image

The unique modular concept can be tailored to every type of machine. The potential distribution terminal blocks AAP are successful thanks to their uniform design with two possible constructions – alternating or grouped. In the grouped structure of the control voltage distribution, the potentials are located on different terminal blocks and thus form entire potential blocks.

General ordering data

Version	Modular distribution terminals, PUSH IN, 6 mm ² , 500 V, 41 A, dark beige
Order No.	2464750000
Type	AAP11 6/6X1.5 LO-LI BL
GTIN (EAN)	4050118479362
Qty.	20 Stück

AAP11 6/6X1.5 LO-LI BL

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technische Daten

Dimensions and weights

Depth	47 mm	Depth (inches)	1.85 inch
Depth including DIN rail	48 mm	Height	85.5 mm
Height (inches)	3.366 inch	Width	8.1 mm
Width (inches)	0.319 inch	Net weight	19 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	Wemid	Colour	dark beige
Colour of operational elements	blue	UL 94 flammability rating	V-0

Rating data IECEx/ATEX

Marking EN 60079-7	Ex ec II C Gc	Ex 2014/34/EU label	II 2 G D
--------------------	---------------	---------------------	----------

System specifications

End cover plate required	Yes	Number of potentials	1
Number of levels	1	Number of clamping points per level	7
Number of potentials per tier	1	PE connection	No
Rail	TS 35	N-function	Yes
PE function	No	PEN function	No

Additional technical data

Installation advice	Rail	Open sides	right
Type of fixing	Snap-on	Type of mounting	TS 35

CSA rating data

Certificate No. (CSA)	200039-70089609	Current size B (CSA)	38 A
Current size C (CSA)	38 A	Current size D (CSA)	10 A
Voltage size B (CSA)	300 V	Voltage size C (CSA)	300 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	26 AWG		

AAP11 6/6X1.5 LO-LI BL

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Technische Daten

info@weidmueller.com

www.weidmueller.com

max. 1.5 mm²

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 1.5 mm²

Conductor cross-section, flexible, further connection, min. 0.5 mm²

Connection type, additional connection PUSH IN

Cross-section for connected wire, multi-core, further connection, max. 1.5 mm²

Cross-section for connected wire, solid-core, further connection, max. 1.5 mm²

Number of connections, additional connection 6

Rated current, additional connection 17.5 A

Conductors for clamping (additional connection)

Blade size, additional connection	0.4 x 2.0 mm
Clamping range, further connection, min.	0.14 mm ²
Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²
Connection direction	top
Cross-section for connected wire, flexible, further connection, max.	1.5 mm ²
Cross-section for connected wire, multi-core, further connection, min.	0.5 mm ²
Cross-section for connected wire, solid-core, further connection, min.	0.5 mm ²
Rated cross-section, further connection	1.5 mm ²
Stripping length , additional connection	8 mm

Clamping range, further connection, max.	1.5 mm ²
Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	1.5 mm ²
Conductor cross-section, flexible, further connection, min.	0.5 mm ²
Connection type, additional connection	PUSH IN
Cross-section for connected wire, multi-core, further connection, max.	1.5 mm ²
Cross-section for connected wire, solid-core, further connection, max.	1.5 mm ²
Number of connections, additional connection	6
Rated current, additional connection	17.5 A

Conductors for clamping (rated connection)

Blade size	1.0 x 5.5 mm
Clamping range, max.	6 mm ²
Clamping range, min.	0.34 mm ²
Connection cross-section, stranded, max.	6 mm ²
Connection cross-section, stranded, min.	0.5 mm ²
Connection direction	top
Gauge to IEC 60947-1	A5
Number of connections	1
Stripping length	12 mm

Tube length for twin wire-end ferrule	Tube length	min.	10 mm
		max.	12 mm
Cross-section for conductor connection	Tube length	nominal	0.5 mm ²
		min.	10 mm
Cross-section for conductor connection	Tube length	max.	18 mm
		nominal	0.75 mm ²
Cross-section for conductor connection	Tube length	min.	12 mm
		max.	18 mm
Cross-section for conductor connection	Tube length	min.	1 mm ²
		max.	1.5 mm ²
Tube length for wire-end ferrule with plastic collar DIN 46228/4	Tube length	min.	10 mm
		max.	12 mm
Cross-section for conductor connection	Tube length	min.	0.5 mm ²
		max.	1 mm ²
Cross-section for conductor connection	Tube length	min.	10 mm
		max.	18 mm
Cross-section for conductor connection	Tube length	nominal	1.5 mm ²
		min.	12 mm
Cross-section for conductor connection	Tube length	max.	18 mm
		nominal	2.5 mm ²
Cross-section for conductor connection	Tube length	min.	10 mm
		max.	18 mm
Cross-section for conductor connection	Tube length	min.	4 mm ²
		max.	6 mm ²

AAP11 6/6X1.5 LO-LI BL

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Technische Daten

Tube length for wire-end ferrule without plastic collar DIN 46228/1	Tube length	nominal	10 mm
	Cross-section for conductor connection	min.	0.5 mm ²
		max.	1 mm ²
	Tube length	min.	10 mm
		max.	18 mm ²
	Cross-section for conductor connection	min.	1.5 mm ²
		max.	2.5 mm ²
	Tube length	min.	12 mm
max.		18 mm	
Cross-section for conductor connection	nominal	4 mm ²	
	min.	10 mm	
Tube length	max.	18 mm	
	min.	6 mm ²	
	max.	10 mm ²	
Twin wire-end ferrules, max.	1.5 mm ²		
Twin wire-end ferrules, min.	0.5 mm ²		
Type of connection	PUSH IN		
Wire connection cross section, finely stranded, max.	6 mm ²		
Wire connection cross section, finely stranded, min.	0.5 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	6 mm ²		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²		
Wire connection cross-section, solid core, max.	6 mm ²		
Wire connection cross-section, solid core, min.	0.5 mm ²		

General

Installation advice	Rail	Rail	TS 35
Standards	IEC 60947-7-1		

Rating data

Rated cross-section	6 mm ²	Rated voltage	500 V
Rated current	41 A	Current at maximum wires	41 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	0.78 mΩ
		Power loss in accordance with IEC 60947-7-x	1.31 W
Rated impulse withstand voltage	6 kV		
Pollution severity	3		

AAP11 6/6X1.5 LO-LI BL

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

Technische Daten

UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	www.weidmueller.com 8 AWG
Conductor size Factory wiring min. (cURus)	26 AWG	Conductor size Field wiring max. (cURus)	8 AWG
Conductor size Field wiring min. (cURus)	26 AWG	Current size B (cURus)	38 A
Current size C (cURus)	38 A	Current size D (cURus)	10 A
Voltage size B (cURus)	300 V	Voltage size C (cURus)	300 V
Voltage size D (cURus)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20

Important note

Product information The applicable safety regulations for the overload and short-circuit of the connected conductors must be followed. The total current of all connected conductors must not exceed the max. load current.

Approvals

Approvals



UL File Number Search	UL Website
Certificate No. (cURus)	E60693

Downloads

Approval/Certificate/Document of Conformity	DNVGL certificate CE Declaration of Conformity UKCA declaration of conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN
User Documentation	AAP Terminal Blocks for control voltage distribution BPZL AXC 1.5-16
Catalogues	Catalogues in PDF-format

AAP11 6/6X1.5 LO-LI BL

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Zeichnungen

