

**VPU PV I+II 3 R 1000 E**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Product image**



Similar to illustration

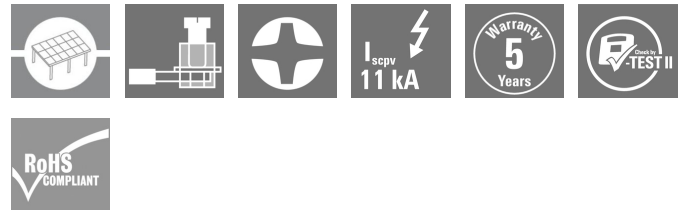

**General ordering data**

Version	Surge voltage arrester, Low voltage, Surge protection I / II, with remote contact
Order No.	<a href="#">2530190000</a>
Type	VPU PV I+II 3 R 1000 E
GTIN (EAN)	4050118540505
Qty.	1 Stück
Replacement parts	<a href="#">2530530000</a> <a href="#">2855300000</a>

Erstellungs-Datum May 22, 2023 4:17:05 PM CEST

Katalogstand 12.05.2023 / Technische Änderungen vorbehalten

## VPU PV I+II 3 R 1000 E

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technische Daten

### Dimensions and weights

Depth	70 mm	Depth (inches)	2.756 inch
Height	104.5 mm	Height (inches)	4.114 inch
Width	54 mm	Width (inches)	2.126 inch
Mounting dimension - height	75 mm	Net weight	447 g

### Temperatures

Storage temperature	85 °C	Operating temperature	-40 °C...85 °C
Operating temperature, min.	-40 °C	Operating temperature, max.	85 °C
Humidity	5 - 95% rel. humidity		

### Connection data, remote alert

Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm <sup>2</sup>
Cross-section for connected wire, solid core, min.	0.25 mm <sup>2</sup>	Stripping length	12 mm

### General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Operating altitude	≤ 4000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20	Rail	TS 35
UL 94 flammability rating	V-0	Version	Surge protection I / II, with remote contact

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

### Photovoltaic technical data

Discharge current $I_n$ (8/20 μs)	20 kA	Discharge current, max. (8/20 μs)	40 kA
Lightning test current $I_{imp}$ (10/350 μs)	6.25 kA	Operating height in the grounded PV system	≤ 2000 m
Operating height in ungrounded PV system	< 4,000 m, see operating instructions	PV system voltage, max. $U_{cpv}$	1,100 V
Protection level $U_p$ (+/-, -/PE, +/-PE)	≤ 3.8 kV	Requirements class	Type I/II
Short-circuit current $I_{SCP}$	11,000 A	Standards	EN 61643-31, EN 50539-11
Total discharge current $I_{total}$ (8/20 μs)	50 kA	Total discharge current $I_{total}$ (10/350 μs)	6.25 kA

### Rated data IEC / EN

Discharge current, max. (8/20 μs)	40 kA	Leakage current at $U_n$	30 μA
Lightning test current $I_{imp}$ (10/350 μs)	6.25 kA	Max. continuous voltage, $U_c$ (DC)	1000 V
Number of poles	3	Response time	≤ 25 ns
SPD type		Signalling contact	250 V 1A 1CO, 125 V AC / 1 A, 48 V CC / 0.5 A, None
Standards	T1, T2 EN 61643-31, EN 50539-11	Voltage type	DC

Erstellungs-Datum May 22, 2023 4:17:05 PM CEST

Katalogstand 12.05.2023 / Technische Änderungen vorbehalten

## VPU PV I+II 3 R 1000 E

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Connection data

Stripping length	18 mm	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	16 mm <sup>2</sup>
Clamping range, min.	1.5 mm <sup>2</sup>	Clamping range, max.	35 mm <sup>2</sup>
Wire cross-section, solid, min.	1.5 mm <sup>2</sup>	Wire cross-section, solid, max.	16 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	1.5 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	25 mm <sup>2</sup>
Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>	Connection cross-section, stranded, max.	35 mm <sup>2</sup>

### Guarantee

Time interval	5 years
---------------	---------

### Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

### Approvals

Approvals



ROHS	Conform
------	---------

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">EAC VPU SERIES</a> <a href="#">CE_VPU_PV</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">EPLAN</a>
User Documentation	<a href="#">Beipackzettel / Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


**VPU PV I+II 3 R 1000 E**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Zeichnungen**

**Electric symbol**



Circuit diagram