

VPU PV I+II 3 1000 E


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



Similar to illustration

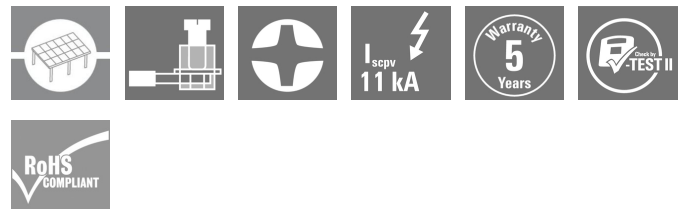

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection I / II
Order No.	2530520000
Type	VPU PV I+II 3 1000 E
GTIN (EAN)	4050118540543
Qty.	1 Stück
Replacement parts	2530530000

Erstellungs-Datum May 22, 2023 4:17:14 PM CEST

Katalogstand 12.05.2023 / Technische Änderungen vorbehalten

VPU PV I+II 3 1000 E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

Dimensions and weights

Depth	70 mm	Depth (inches)	2.756 inch
Height	96 mm	Height (inches)	3.78 inch
Width	54 mm	Width (inches)	2.126 inch
Mounting dimension - height	75 mm	Net weight	440 g

Temperatures

Storage temperature	85 °C	Operating temperature	-40 °C...85 °C
Operating temperature, min.	-40 °C	Operating temperature, max.	85 °C
Humidity	5 - 95% rel. humidity		

General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Operating altitude	≤ 4000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20	Rail	TS 35
UL 94 flammability rating	V-0	Version	Surge protection I / II

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Photovoltaic technical data

Discharge current I_n (8/20 μ s)	20 kA	Discharge current, max. (8/20 μ s)	40 kA
Lightning test current I_{imp} (10/350 μ s)	6.25 kA	Operating height in the grounded PV system	≤ 2000 m
Operating height in ungrounded PV system	< 4,000 m, see operating instructions	PV system voltage, max. U_{cpv}	1,100 V
Protection level U_p (+/-, -/PE, +/-PE)	≤ 3.8 kV	Requirements class	Type I/II
Short-circuit current I_{SCPV}	11,000 A	Standards	EN 61643-31, EN 50539-11
Total discharge current I_{total} (8/20 μ s)	50 kA	Total discharge current I_{total} (10/350 μ s)	6.25 kA

Rated data IEC / EN

Discharge current, max. (8/20 μ s)	40 kA	Leakage current at U_n	30 μ A
Lightning test current I_{imp} (10/350 μ s)	6.25 kA	Max. continuous voltage, U_c (DC)	1000 V
Number of poles	3	Response time	≤ 25 ns
SPD type	T1, T2	Signalling contact	No
Standards	EN 61643-31, EN 50539-11	Voltage type	DC

VPU PV I+II 3 1000 E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

Connection data

Stripping length	18 mm	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	16 mm ²
Clamping range, min.	1.5 mm ²	Clamping range, max.	35 mm ²
Wire cross-section, solid, min.	1.5 mm ²	Wire cross-section, solid, max.	16 mm ²
Wire connection cross section, finely stranded, min.	1.5 mm ²	Wire connection cross section, finely stranded, max.	25 mm ²
Connection cross-section, stranded, min.	1.5 mm ²	Connection cross-section, stranded, max.	35 mm ²

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	EAC VPU SERIES CE_VPU_PV
Engineering Data	CAD data – STEP
Engineering Data	EPLAN
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU PV I+II 3 1000 E

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Zeichnungen

Electric symbol



Circuit diagram