


SFX-VT 9/24 MM GE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

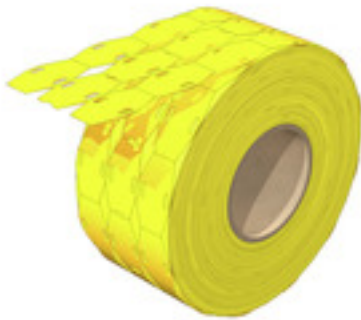

Highly flexible: SFX

SFX markers are the preferred choice for labelling cables if you prefer the classic cable tie solution. Cables do not always run in a straight line. The material used in SFX markers addresses this fact with highly flexible polyurethane. The marker follows each curve of the cable and latches on with ease.

General ordering data

| | |
|--------------------|--|
| Version | SlimFix, Conductor and cable markers, 7 - , 26 x 15 mm, yellow |
| Order No. | 2621460000 |
| Type | SFX-VT 9/24 MM GE |
| GTIN (EAN) | 4050118625585 |
| Qty. | 1,000 Stück |
| compatible printer | 2599430000 2599440000 |

Erstellungs-Datum May 26, 2023 9:05:15 AM CEST

Katalogstand 12.05.2023 / Technische Änderungen vorbehalten

SFX-VT 9/24 MM GE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technische Daten

Dimensions and weights

| | | | |
|------------|-------|-----------------|------------|
| Height | 26 mm | Height (inches) | 1.024 inch |
| Width | 15 mm | Width (inches) | 0.591 inch |
| Net weight | 0.2 g | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -55...105 °C |
|-----------------------------|--------------|

General data

| | | | |
|-----------------------------------|--------------|-----------------------------------|--------------|
| Colour | yellow | Halogen | No |
| Material | Polyolefine | Operating temperature range | -55...105 °C |
| Operating temperature range, max. | 105 °C | Operating temperature range, min. | -55 °C |
| Size of labelling field | 23.5 x 9 mm | UL 94 flammability rating | HB |
| Version | halogen-free | Width | 15 mm |

Conductor and cable markers

| | | | |
|----------------------|---------|----------------|-----|
| Cable tie passage | Flat | Conductor O.D. | 7 - |
| Conductor O.D., min. | 7 mm | Halogen | No |
| Suitable cable tie | Plastic | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ETIM 8.0 | EC001530 | ECLASS 9.0 | 27-40-04-01 |
| ECLASS 9.1 | 27-40-04-01 | ECLASS 10.0 | 27-40-04-01 |
| ECLASS 11.0 | 27-28-11-02 | ECLASS 12.0 | 27-28-11-02 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|------------------|--|
| Engineering Data | CAD data – STEP |
| Engineering Data | EPLAN |
| White paper | 08_PV-Fact-Sheet-PV-Markierer_DE.pdf 08_PV-Fact-Sheet-PV-Markers_EN.pdf |
| Catalogues | Catalogues in PDF-format |

Datenblatt

SFX-VT 9/24 MM GE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Zeichnungen

