


Shaft Supports T-Shaped Set Screw (Machined)

Standard / Wide

■Features: Dowel Hole Type enables easy positioning in assembly.

■Standard




RoHS10


Assembly Examples **P.232**

25 / (6.3 / 1.5 /)

W/o Dowel Hole



With Dowel Hole

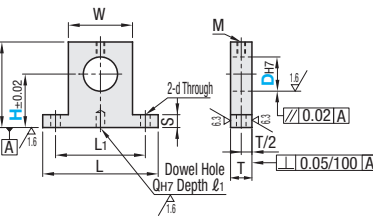


W/o Dowel Hole	With Dowel Hole	Material	Surface Treatment	Accessory
Height H Selectable	Height H Configurable	Height H Selectable		
SHTB	SHTBH/SHTBK	EN 1.1191	Black Oxide	Hex Socket Set Screw 1 pc.
SHTM	SHTMH/SHTMK	EN 1.4301	Electroless Nickel Plating	Hex Socket Set Screw 1 pc. (Stainless Steel)
SHTS	SHTSH/SHTSK	EN 1.4301	-	Hex Socket Set Screw 1 pc. (Stainless Steel)
SHTA	SHTAH	EN AW-6063	Clear Anodize	Hex Socket Set Screw 1 pc.

Part Number	H			L	H ₁	T	S	W	Set Screw M	L ₁	d	Q	ℓ ₁	Unit Price														
Type	D	Height H Selectable Type	Height H Configurable Type 0.1mm Increment											W/o Dowel Hole					With Dowel Hole									
														Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type							
W/o Dowel Hole	3	10 15 20	10.0~20.0	26	H+5	8	4	10	M3	18	3.5	-	-															
	4	15 20 25	15.0~25.0		H+6																							
	5	20 25 30	20.0~30.0		H+7																							
	6	25 30 40	25.0~40.0		H+8																							
	8	10 15 20 25 30 40	10.0~40.0	42	H+9	10	6	18	M4	30	4.5	4	5															
	SHTB	15 20 25 30 40	15.0~40.0		H+10																							
	SHTM	20 25 30	20.0~30.0		H+11																							
	SHTS	25 30 40	25.0~40.0		H+12																							
	SHTA	15 20 25 30 40	15.0~40.0	54	H+15	16	8	35	50	6.6	5	7																
	SHTBH	20 25 30 40	20.0~30.0																									
	SHTMH	25 30 40 50 60	25.0~60.0																									
	SHTSH	30 40 50 60	30.0~60.0																									
SHTAH	15 20 25 30 40 50 60	15.0~60.0	67	H+18	20	10	45	M6	65	9	5	7																
25	20 25 30 40 50 60	20.0~60.0		H+20																								
30	25 30 40 50 60	25.0~60.0		H+23																								
SHTBK	30 40 50 60	30.0~60.0		H+25																								
SHTMK	40 25 30 40 60 80	30.0~80.0	100	H+30	15	75	80	100	14	10	14	-	-	-	-	-	-	-	-	-								
SHTSK	50	40.0~80.0		H+38																								
(8≤D≤4)	50	-	40.0~80.0	125	H+38																							

⚠ H dimensions in () are applicable to w/o Dowel Hole Type only. ⚠ Dowel Hole Type is applicable to D dimensions 8 ~ 40 only.

■Features: T dimension is thicker in comparison to Standard Type (I.D. D x1 ~ 1.5). Aluminum products are suitable for weight saving.

■Wide

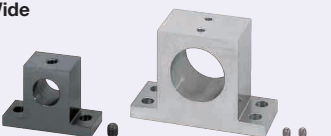


RoHS10


Assembly Examples **P.232**

25 / (6.3 / 1.5 /)

D8~25



D30~50

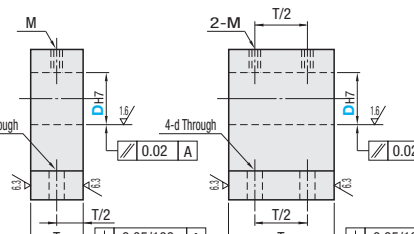

Type	Material	Surface Treatment	Accessory
SHTBN	EN 1.1191	Black Oxide	Hex Socket Set Screw 1 pc.
SHTMN	EN 1.4301	Electroless Nickel Plating	Hex Socket Set Screw 1 pc. (Stainless Steel)
SHTSN	EN AW-6063	Clear Anodize	Hex Socket Set Screw 1 pc.

⚠ D dimensions 30 ~ 50 come with 2 screws.

Part Number	Type	H		L	H ₁	T	S	W	Set Screw M	L ₁	d	Unit Price		
		D	Selection									SHTBN	SHTMN	SHTSN
SHTBN SHTMN SHTSN		8	10 15 20 25 30 40	42	H+9	15	6	18	M6	30	6.6			
		10	15 20 25 30 40 50 60	42	H+10	-	-	-	-	-	-			
		12	15 20 25 30 40 50 60	42	H+11	-	-	-	-	-	-			
		13	15 20 25 30 40 50 60	42	H+12	-	-	-	-	-	-			
		15	15 20 25 30 40 50 60	54	H+15	20	-	30	-	42	-			
		16	15 20 25 30 40 50 60	54	H+15	-	-	-	-	-	-			
		20	20 25 30 40 50 60 80	67	H+18	25	8	35	-	50	9			
		25	20 25 30 40 50 60 80	67	H+20	30	-	-	-	-	-			
		30	25 30 40 50 60 80	85	H+23	35	10	45	M8	65	6.6			
		35	25 30 40 50 60 80	85	H+25	-	-	-	-	80	9			
		40	30 40 50 60 80	100	H+30	40	-	60	-	100	11			
		50	40 50 60 80	125	H+38	50	15	75	-	100	11			


Ordering Example
Part Number - H
SHTB8 - 25
SHTMH15 - 25.6
SHTBN35 - 50

Shaft Supports T-Shaped Slit (Machined)

Standard / Wide

■Features: Dowel Hole Type enables easy positioning in assembly. High locating repeatability on assembly for maintenance.

■Standard




RoHS10


Assembly Examples **P.232**

25 / (6.3 / 1.5 /)

W/o Dowel Hole



With Dowel Hole

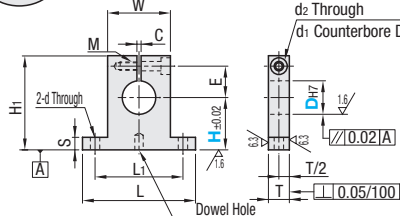


W/o Dowel Hole	With Dowel Hole	Material	Surface Treatment	Accessory
Height H Selectable	Height H Configurable	Height H Selectable		
SHSTB	SHSTBH/SHSTBK	EN 1.1191	Black Oxide	Hex Socket Head Cap Screw 1 pc.
SHSTM	SHSTMH/SHSTMK	EN 1.4301	Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
SHSTS	SHSTSH/SHSTSK	EN 1.4301	-	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
SHSTA	SHSTAH	Aluminum Alloy 6000 series	Clear Anodize	Hex Socket Head Cap Screw 1 pc.
SHSTD	SHSTDH	-	Black Anodize	Hex Socket Head Cap Screw 1 pc.

⚠ Slit is machined after the mounting hole D is bored to H₇ tolerance. The tolerance may become H₈ or so depending on the machining condition.

Part Number	H		L	H ₁	T	S	W	L ₁	d	E	Tightening Screw M	d ₂	d ₁	ℓ	C	Q	ℓ ₁	Unit Price												
Type	D	Height H Selectable Type																Height H Configurable Type 0.1mm Increment	W/o Dowel Hole								With Dowel Hole			
																			Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type	Height H Selectable Type	Height H Configurable Type				
W/o Dowel Hole	3			H+11					7																					
	4	10 15 20	10.0~20.0	26	8	4	10	18	3.5	M3	3.5	6.5	3.5	1.5	-	-														
	5	SHSTB																												
	6	SHSTM	10 15 20 25	10.0~25.0	H+12					8	Through																			
	8	SHSTS	10 15 20 25 30 40	10.0~40.0																										
	10	SHSTA	10 15 20 25 30	10.0~30.0																										
	12	SHSTD			42					11																				
	13																													
	15																													
	16																													
Height H Configurable	13	15 20 25 30	15.0~30.0	H+18	10	6		18	30	4.5	13	Through	4.5	8	4.5		4	5												
	15																													
	16	15 20 25 30 40	15.0~40.0	54	H+20			30	42		15	M4 Depth 8				2														
	18																													
	20	20 25 30 40 50 60	20.0~60.0	67	H+26	16	8	35	50	6.6	18	M6 Through	6.6	11	6.5															
	25																													
	30	25 30 40 50 60	25.0~60.0	85	H+33			45	65	9	27	M8 Depth 16	9	14	9		5	7												
	35	30 40 50 60	30.0~80.0	100	H+38			60	80		29																			
	40	40 50 60 80	40.0~80.0	125	H+51	25	15	75	100	14	38	M12 Depth 24	14	20	13															
	50																													

⚠ H dimensions in () are applicable to w/o Dowel Hole Type only. ⚠ Dowel Hole Type is applicable to D dimensions 8 ~ 50 only.

■Wide




RoHS10

Assembly Examples **P.232**

25 / (6.3 / 1.5 /)

D8~25



D30~50