



Oil Free Slide Plates

Copper Alloy Configurable Type

■ **Features:** Dimensions are configurable by 1mm unit. Best suitable for slide portion with 5mm plate thickness and small space.
🔍 For material characteristic values, refer to **P.380**. 🔄 Initial greasing is recommended for effective use.

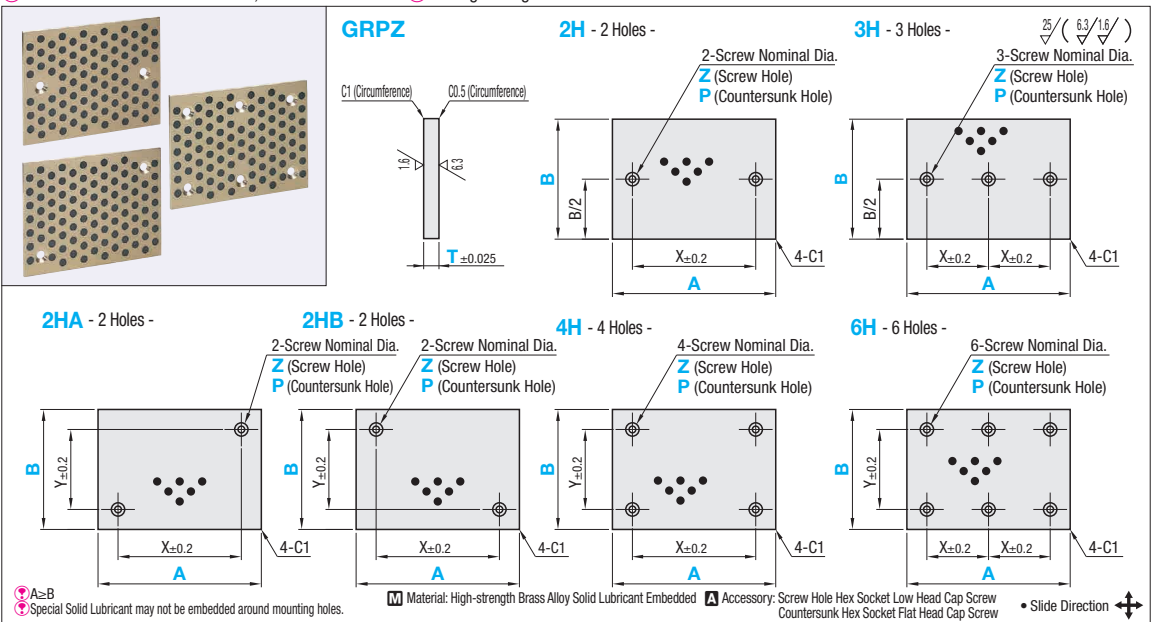

Part Number	1mm Increment		T	Screw Nominal Dia.		X	Y
	Type	Nominal		T=5	T=10		
GRPZ	2H	50~60	5	P5	P6 Z6	30	-
		61~80				40	
		81~100				60	
		101~120				80	
		121~150				100	
		151~180				65x2	
	3H	181~200	10	P6	P6 Z8	80x2	
		50~60				30	30(B≤80) 60(B≥81)
		61~80				40	
		81~100				60	
		101~120				80	
		121~150				100	
	4H	151~180	5	P5	P6 Z6	60	
		181~200				80	
		50~60				100	
		61~80				60	
		81~100				80	
		101~120				100	
	6H	121~150	10	P6	P6 Z8	65x2	
		150~180				80x2	
		181~200				100(B≥121)	



🔄 Z Specification of Z (screw holes) is the same as that of Hex Socket Head Cap Screw on **P.194**.

Included Screw Size			
Screw Nominal Dia.	Mxℓ		
	P5	P6, Z6	Z8
T=5	M5x16	M6x16	-
T=10	-	M6x20	M8x20


Part Number		T	A	Unit Price					
Type	Nominal			B					
				28~40	41~60	61~80	81~100	101~120	121~150
GRPZ	2H	5	50~60			-	-	-	-
			61~80				-	-	-
			81~100				-	-	-
			101~120				-	-	-
			121~140				-	-	-
			141~160						
			161~180						
			181~200						
	2HA	10	50~60			-	-	-	-
			61~80				-	-	-
			81~100				-	-	-
			101~120				-	-	-
			121~140				-	-	-
			141~160						
			161~180						
			181~200						

Ordering Example: Part Number - A - B - T - Screw Nominal Dia.
GRPZ4H - 150 - 100 - 10 - Z6

Oil Free Slide Plates


Copper Alloy

■ **Features:** With thread locking treatment screw to prevent falling-off due to looseness (UTW type only) 🔍 For material characteristic values, refer to **P.380**. 🔄 Initial greasing is recommended for effective use.

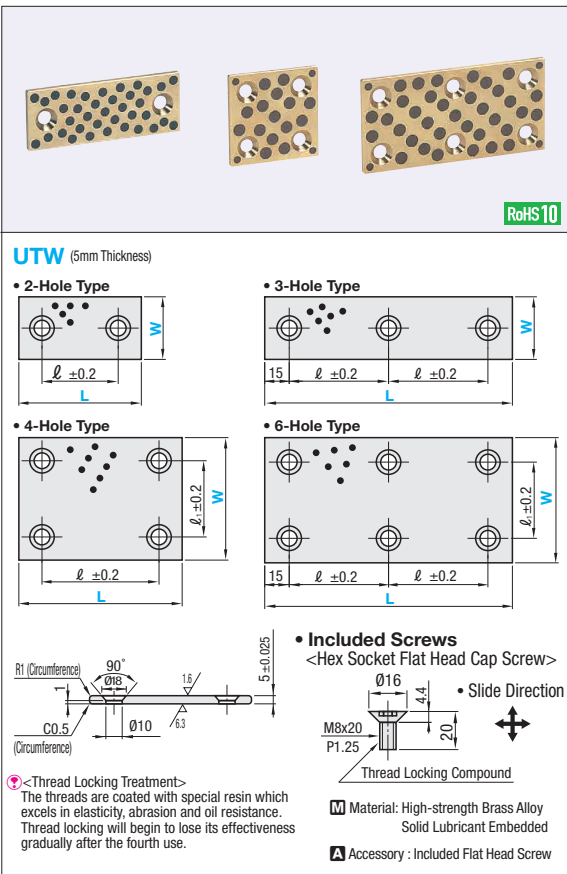

Part Number	W	L	Mounting Hole Type	ℓ	ℓ1	Unit Price
UTW	28	50	2 Holes	20	-	
		75		45		
		100	3 Holes	70		
		150		60		
	38	50	2 Holes	20	-	
		75		45		
		100	3 Holes	70		
		150		60		
	48	75	2 Holes	45	-	
		100		70		
		125	3 Holes	95		
		150		60		
	75	75	4 Holes	45	45	
		100		70		
		125	6 Holes	95		
		150		60		
	100	100	4 Holes	70	70	
		125		95		
		150	6 Holes	70		
		150		60		

Ordering Example: Part Number - W - L
UTW 75 - 100

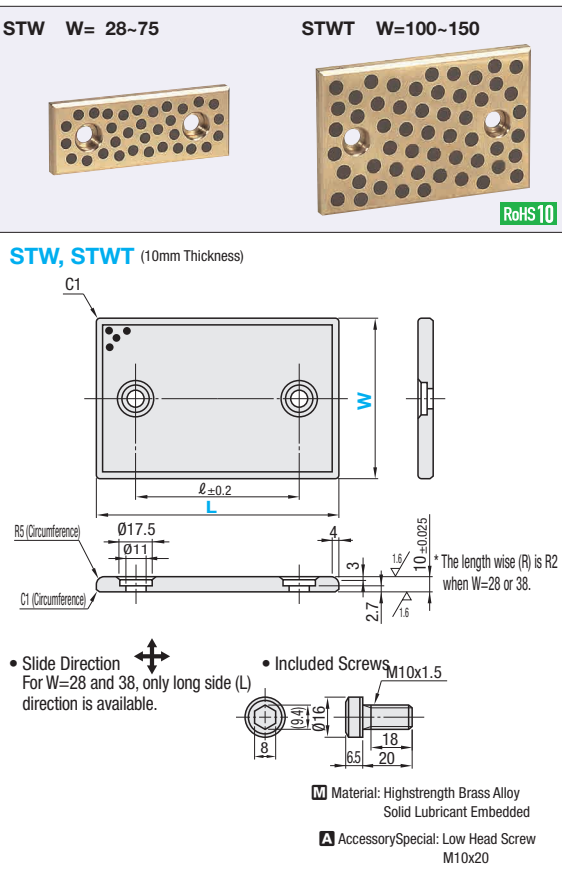

Part Number	W	L	ℓ	Unit Price
STW	28	75	45	
		100	50	
		125	75	
		150	100	
	38	75	45	
		100	50	
		125	75	
		150	100	
	48	75	45	
		100	50	
		125	75	
		150	100	
	75	75	25	
		100	50	
		125	75	
		150	100	
	100	100	50	
		125	75	
		150	100	
		200	150	
STWT	100	250	200	
		150	100	
		200	150	
		250	200	
	125	150	100	
		200	150	
		250	200	
		150	100	
	150	200	150	
		200	150	