


## **Slot Pins for Inspection Components**

Straight, Handle Length Fixed



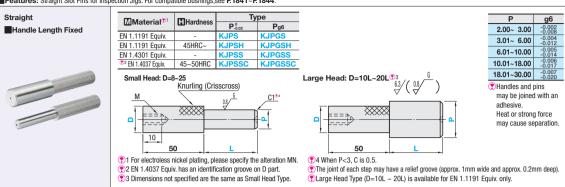

Pa	rt Number		0.01mm Increment	1mm Increment	
Tyj	oe	D	P	L	M
(P <sub>-0.02</sub> )	(P <sub>-0.02</sub> ) (Pg6)		Configurable	Configurable	
(EN 1.1191 Equiv.)	(EN 1.1191 Equiv.)	8	2.00~ 6.00		M4
KJPS	KJPGS	10	2.00~ 8.00	(When P<8)	M5
(EN 1.1191 Equiv.	(EN 1.1191 Equiv.	12	4.00~10.00	5~40 (When P≥8)	M5
Hardened)	Hardened)		5~50	M5	
KJPSH	KJPGSH	20	10.00~18.00		M5
	[	25	15.00~23.00	For EN 1.4301 Equiv.	M5
(EN 1.4301 Equiv.)	10.00~16.00 - 10.00~16.00	L≤Px5	M5		
KJP55	KJPGSS	12L	12.00~20.00	For longer pins, 🐼 <b>P.1827</b> .	M5
(EN 1.4037 Equiv.)	(EN 1.4037 Equiv.)	16L	16.00~25.00	pilis, ≅ <b>r. 1627</b> .	M5
KJPSSC	KJPGSSC	20L	20.00~30.00		M5





D			P.8	0.02		P <sub>g6</sub>			
		KJPS	KJPSH	KJPSS	KJPSSC	KJPGS	KJPGSH	KJPGSS	KJPGSSC
	8								
	10								
Small Head	12								
Siliali neau	16								
	20								
	25								
	10L			-	-			-	-
Large	12L			-	-			-	-
Head	16L			-	-			-	-
	201			_	_			_	_




Alterations	Code	Spec.
5 04 Chain Afterations	СН	Loss-proof chain (length 600mm) is attached to gauge body.  Pror chains only, see P1862.
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied.  Applicable to Material EN 1.1191 Equiv. only.  Combination with STC is not available.
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment.  Applicable to Material EN 1.1191 Equiv. only.  Combination with MN is not available.
Engraving of P Dimension  O  O	КН	Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary)  • Engraved on the reverse side when combined with KF and KHS.
Engraving of the Specified Characters  MSSIMMOGS4	KF	Engraves alphabet or number. (Dering Color NF-MIS)MIOUS A Philips Color and Philips

Alterations	Code	Spec.			
L Dimension Tolerance	LKC	Changes L dimension tolerance to ±0.05.  Ondering Code LKC  When the LKC is used, 0.1mm increment can be specified for L Dimension.  L<30  P>4			
No Relief Groove	NMN	Omits the relief groove between knurled part and straight part on the step.  Not applicable to Large Head Type.			
Handle Length	ZC	Changes handle length 50 to 10, 20, 30 or 40.    Downy Code   ZCZO   Co			
Tapered Tip	STT	Tapers the tip.  (*Applicable when L≥10. (*The length of m is included in that of L.    P			
Air Vent 0.2	ABT	Adds air vent to P dimension.			

Caution when making alterations to engraving (KH, KF)

## **Slot Pins for Inspection Components**

**Straight, Handle Length Selectable** 

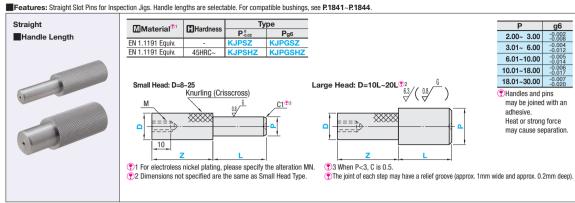


Part Number Type		0.01mm Increment		1mm Increment Z		М	
(P-0.02 )	(Pg6)	D	Configurable	Configurable	Selection		
		8	2.00~ 6.00		*	M4	
		10	2.00~ 8.00	(When P<8) 5~40	10	M5	
(EN 1.1191 Equiv.)	(EN 1.1191 Equiv.)	12	4.00~10.00	(When P≥8)	20	M5	
KJPSZ	KJPGSZ	16	8.00~14.00	5~50	30	M5	
		20	10.00~18.00			M5	
(EN 1.1191 Equiv.	(EN 1.1191 Equiv.	25	15.00~23.00	For EN 1.4301 Equiv. L≤Px5	40	M5	
Hardened) KJPSHZ	Hardened) KJPGSHZ	10L	10.00~16.00			M5	
KJPSHZ	KJPGSHZ	12L	12.00~20.00	For longer pins, <b>≥ P.1827</b> .	30	M5	Tapped holes are not provided on products with Z=10.
		16L	16.00~25.00	pino, == F. 1027.	40	M5	*Z dimension 10 and 20 are only available when P≥5 and
		20L	20.00~30.00			M5	pin length L≤30.



D		P.0	0.02	P <sub>g6</sub>		
		KJPSZ	KJPSHZ	KJPGSZ	KJPGSHZ	
	8					
	10					
Small Head	12					
Small Head	16					
	20					
	25					
	10L					
Large	12L					
Head	16L					
	201					

Alterations 🛣	Part Number - P KJPSZ20 - P16.6	 - Z - Z20	- (CH, KH, KF···etc.) - MN	
Alterations	Code		Spec.	

Alterations	Code	Spec.
5 04 Chain Afterations	СН	Loss-proof chain (length 600mm) is attached to gauge body.  • For chains only, see P1862.
Additional Surface Treatment (Electroless Nickel Plating)	MN	Electroless nickel plating is applied.  Applicable to Material EN 1.1191 Equiv. only.  Combination with STC is not available.
Additional Surface Treatment (Black Oxide)	STC	Adds black oxide surface treatment.  Applicable to Material EN 1.1191 Equiv. only.  Combination with MN is not available.
Engraving of P Dimension  O  O	КН	Machines flats on knurled head and engraves P dimension (with the character orientation arbitrary) .  Not applicable to handle length 10.  Forgraved on the reverse side when combined with KF and KHS.
Engraving of the Specified Characters	KF	Engraces alphabet or number. Disease loan IR-MISSIM00034 ("A loan princip, cluber than the princip Character and the princ

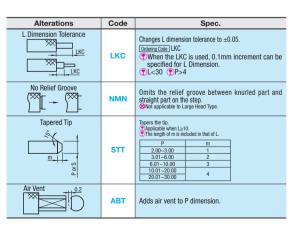

Ordering Part Number (TYPE, D) - P - L - Z

Caution when making alterations to engraving (KH, KF)



If the pin and the knurled part are joined with an adhesive 10mm of the tip is not machined flat because the tip is thin.