# Welded Steel Stands
## Shaped Steel

| Type | | M Material | S Surface Treatment |
|---|---|---|---|
| No Hole | Hole Position Configurable | | |
| YSSTC | YSCT | EN 1.0038 Equiv. | - |
| YSSTB | YSST | | Black Oxide |
| YSSTM | YSMT | | Electroless Nickel Plating |
| - | YSFT | EN 1.4301 Equiv. | - |

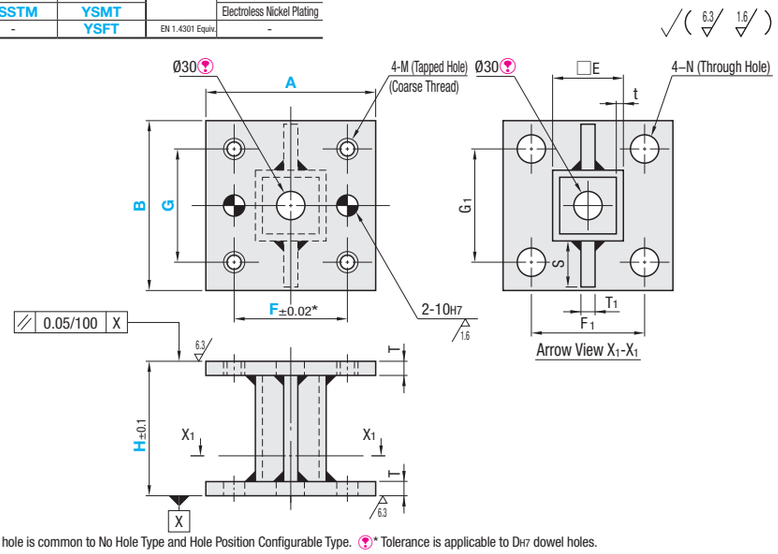


RoHS10

Ø30 hole is common to No Hole Type and Hole Position Configurable Type. * Tolerance is applicable to DH7 dowel holes.

### No Hole

| Part Number Type | A | B | H Selection | T | T1 | E | t | S | Unit Price YSSTC H100 | YSSTC H150 H200 | YSSTC H250 H300 | YSSTB H100 | YSSTB H150 H200 | YSSTB H250 H300 | YSSTM H100 | YSSTM H150 H200 | YSSTM H250 H300 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| YSSTC YSSTB YSSTM | 100 | 100 | 100 150 200 250 300 | 10 | 9 | 50 | 3.2 | 22 | | | | | | | | | |
| | | 120 | | | | | | 32 | | | | | | | | | |
| | | 150 | | | | | | 44 | | | | | | | | | |
| | 125 | 120 | | | | 75 | | 19 | | | | | | | | | |
| | 150 | 150 | | 14 | 12 | | 4.5 | 32 | | | | | | | | | |
| | 200 | 200 | | | | 100 | | 44 | | | | | | | | | |

### Hole Position Configurable

| Part Number Type | A | B | H Selection | 1mm Increment G | 1mm Increment F | T | T1 | E | t | S | F1 | G1 | M | N | Unit Price YSCT H100 | YSCT H150 H200 | YSCT H250 H300 | YSST H100 | YSST H150 H200 | YSST H250 H300 | YSMT H100 | YSMT H150 H200 | YSMT H250 H300 | YSFT H100 | YSFT H150 H200 | YSFT H250 H300 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| YSCT YSST YSMT YSFT | 100 | 100 | 100 150 200 250 300 | 30~80 | 70~80 | 10 | 9 | 50 | 3.2 | 22 | 80 | 80 | M10 | 11 | | | | | | | | | | | | |
| | | 120 | | 30~100 | | | | | | 32 | | 100 | | | | | | | | | | | | | | |
| | | 150 | | 30~130 | | | | | | 44 | | 130 | | | | | | | | | | | | | | |
| | 125 | 120 | | 30~100 | 95~100 | | | 75 | | 19 | 100 | 100 | | | | | | | | | | | | | | |
| | 150 | 150 | | 35~120 | 95~120 | 14 | 12 | | 4.5 | 32 | 120 | 120 | M12 | 14 | | | | | | | | | | | | |
| | 200 | 200 | | 35~170 | 120~170 | | | 100 | | 44 | 160 | 160 | | | | | | | | | | | | | | |

Ordering Example: Part Number - B - H - G - F
YSSTB100 - B150 - H300
YSST150 - B150 - H200 - G100 - F95

Alterations: Part Number - B - H - G - F - (HKC)
YSST150 - B150 - H200 - G100 - F95 - HKC

| Alteration | Code | Spec. |
|---|---|---|
|   | HKC | Changes the tolerance of dimension H to H±0.05. Ordering Code HKC |

# Welded Steel Stands
## Shaped Steel, Height Configurable

■**Features:** When the mounting hole pitch does not match with the fixed height / dimension on the left-hand page, the following standard is available.

| Type | M Material | S Surface Treatment |
|---|---|---|
| YSCFT | EN 1.0038 Equiv. | - |
| YSSFT | | Black Oxide |
| YSMFT | | Electroless Nickel Plating |

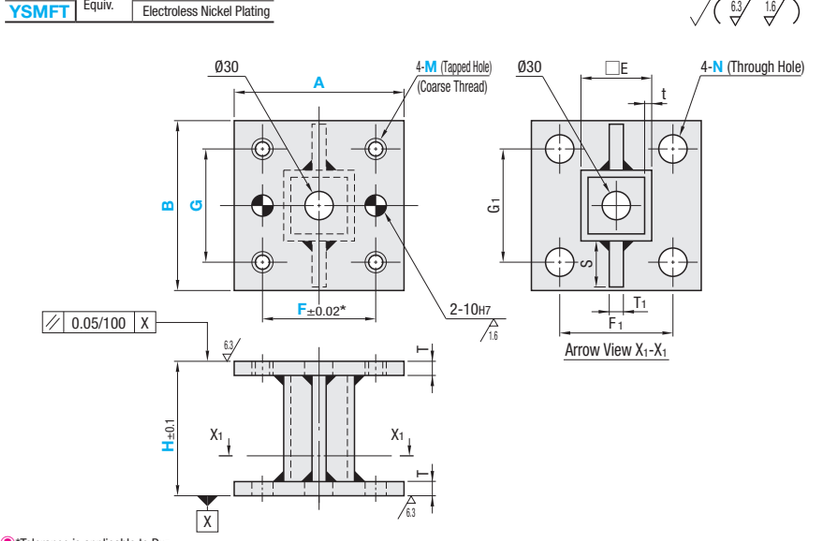


RoHS10

*Tolerance is applicable to DH7.

| Part Number Type | A | B | H 1mm Increment | G 1mm Increment | F | M (Tapped Hole) | N (Through Hole) | T | T1 | E | t | S | F1 | G1 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| YSCFT YSSFT YSMFT | 100 | 100 | 100~300 | 30~80 | 70~80 | 8 10 12 | 9 11 14 | 10 | 9 | 50 | 3.2 | 22 | 80 | 80 |
| | | 120 | | 30~100 | | | | | | | | 32 | | 100 |
| | | 150 | | 30~130 | | | | | | | | 44 | | 130 |
| | 125 | 120 | | 30~100 | 95~100 | | | | | 75 | 4.5 | 19 | 100 | 100 |
| | 150 | 150 | | 30~120 | 95~120 | | | 14 | 12 | | | 32 | 120 | 120 |
| | 200 | 200 | | 30~170 | 120~170 | | | | | 100 | | 44 | 160 | 160 |

Ordering Example: Part Number - B - H - G - F - M - N
YSCFT100 - B150 - H251 - G80 - F74 - M8 - N11

Alterations: Part Number - B - H - G - F - M - N - (HKC)
YSCFT100 - B150 - H251 - G80 - F74 - M8 - N11 - HKC

| A | B | H 1mm Increment | Unit Price YSCFT | Unit Price YSSFT | Unit Price YSMFT |
|---|---|---|---|---|---|
| 100 | 100 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |
| | 120 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |
| | 150 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |
| 125 | 120 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |
| 150 | 150 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |
| 200 | 200 | 100~150 | | | |
| | | 151~200 | | | |
| | | 201~250 | | | |
| | | 251~300 | | | |

| Alteration | Code | Spec. |
|---|---|---|
|   | HKC | Changes the tolerance of dimension H to H±0.05. Ordering Code HKC |