


Welded Steel Stands

Plate Type

■ **Features:** Height and mounting hole pitch can be specified in 1mm increment.



Type	Material	Surface Treatment
YSSP	EN 1.0038	-
YSBP	EN 1.0038 Equiv.	Black Oxide
YSMP	EN 1.4301	Electroless Nickel Plating
YSFP	EN 1.4301 Equiv.	-

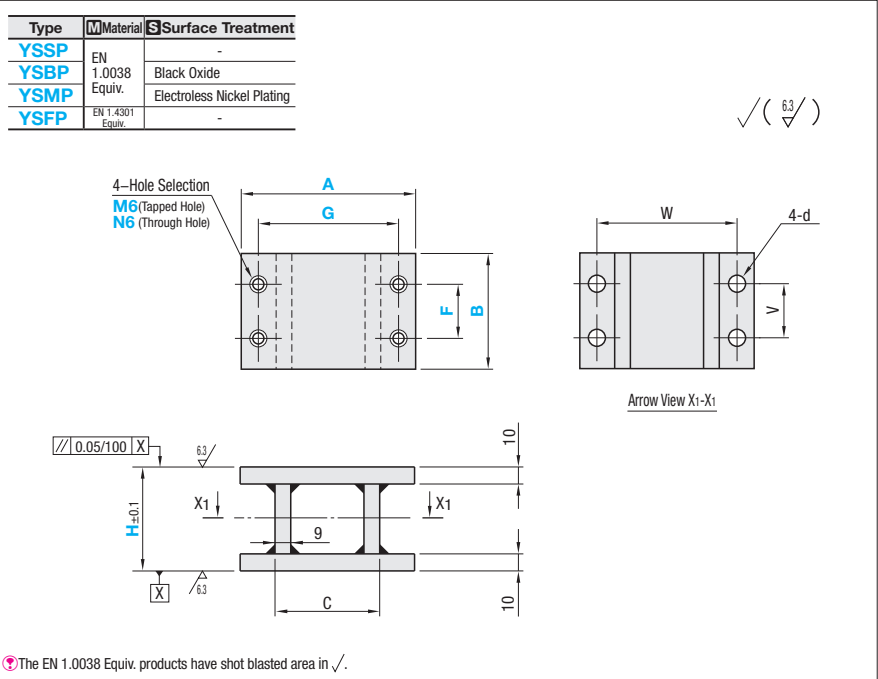

RoHS10

The EN 1.0038 Equiv. products have shot blasted area in √.

Part Number		B	1mm Increment			Hole Type	C	V	W	d
Type	A		H	F	G					
YSSP (No Surface Treatment) YSBP (Black Oxide) YSMP (Electroless Nickel Plating) YSFP (Stainless Steel)	100	50	50~200	15≤F≤B-20	80	M6 (Tapped Hole) N6 (Ø6.5 Through Hole)	50	30	80	6.5
		60						40		
		70						50		
		80						60		
		100						80		
	120	50			90~100		60	30	100	9
		60						40		
		70						50		
		80						60		
		100						80		
	150	50			105~130		75	30	130	
		60						40		
		70						50		
		80						60		
		100						80		
	200	120			130~180		100	90	120	11
		150						120		
		50						30		
		60						40		
		70						50		
		80						60		
		100						70		
		120						90		
		150						120		
		200						170		

Ordering Example

Part Number - B - H - F - G - Hole Type

YSSP100 - B100 - H150 - F75 - G80 - M6

YSSP200 - B150 - H200 - F100 - G150 - N6

Part Number		B	Unit Price											
Type	A		YSSP			YSBP			YSMP			YSFP		
YSSP	100	50	H50~100	H101~150	H151~200	H50~100	H101~150	H151~200	H50~100	H101~150	H151~200	H50~100	H101~150	H151~200
		60												
		70												
		80												
		100												
	120	50												
		60												
		70												
		80												
		100												
	150	50												
		60												
		70												
		80												
		100												
	200	120												
		150												
		50												
		60												
		70												
		80												
		100												
		120												
		150												
		200												

Alterations

Part Number - B - H - (HNC)

YSSP200 - B150 - H200 - HNC

Alteration	Code	Spec.
	HNC	Eliminates the top installation holes (M6 or N6). (Bottom Installation Holes are retained.) Ordering Code HNC Specifying of dimensions F and G and hole types are not necessary.

Example

