
Extruded Brackets - For 1 Slot

HBKTST5

For 5 Series (Slot Width 6mm) Aluminum Extrusions




Features: Perpendicularly Machined Type Extruded Brackets with tabs to fit extrusions. Brackets with tabs to fit in slots of extrusions and stop rotating when tightening.



HBKTST5 HBKTS5	Part Number	Perpendicular K
	HBKTST5	0.03
HBKTSB5	HBKTS5	
(Black Anodize)	HBKTSB5* (Black Anodize)	0.06
T	T Manager 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4 T

EN AC-51400-T5




Part Number	Mass	Applica	able S	Screw, T Nut		Allowable	Unit Price	Volume Discount Rate
Part Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200
HBKTST5								
HBKTS5	15	CBM5-10	١٠	HNTT5-5	١٠	833		
HBKTSB5*	15	CBIVID-10	2	HINI 13-3	2	833		
(Black Anodize)								

* For repairing black anodizing, refer to P.846.

Features: Aluminum Extruded Brackets. Excels in appearance.



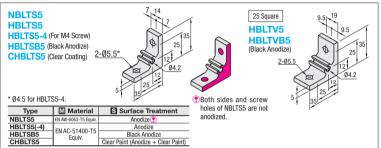

Part Number	Mass	Applica	able S	Screw, T Nut			Unit Price	
Part Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200
NBLTS5 HBLTS5		CBM5-10		HNTT5-5				
HBLTS5-4 (For M4 Screw)	15	CBM4-10		HNTT5-4				
HBLTSB5* (Black Anodize)	15		2		2	833		
CHBLTS5 (Clear Coating)		CBM5-10		HNTT5-5				
HBLTV5			l i					
HBLTVB5* (Black Anodize)	20							


Example of Extrusion Connection Connection with Thick Bracket CBM5-10 HFS5-2020 CBM5-10 \HFS5-2020

* For repairing black anodizing, refer to P.846.

Features: Numbers of screws are the same as HBKTS5. Extrusions can be connected more securely. Perpendicularly Machined.








Part Number	Mass	Applica	ble S	Screw, T Nut			Unit Price	
Part Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200
HBKUS5								
HBKUSB5*	31	CBM5-14	2	HNTT5-5	2	833		

* For repairing black anodizing, refer to P.846.

Features: Numbers of screws are the same as HBLTS5. Extrusions can be connected more securely.






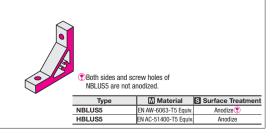

5 31 CBM5-14 2 HNTT5-5 2 833

Features: Hole positions are offset. Can be combined with plates of 3mm thickness when using taps for mounting covers.





Туре	Material	S Surface Treatment
HBLTH5	EN AC-51400-T5	Anodize
HBLTHB5	Equiv.	Black Anodize
	-	

Part	Mass	Applica						Volume Discount Rate
Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200
HBLTH5								
HBLTHB5* (Black Anodize)	15	CBM5-10	2	HNTT5-5	2	833		

* For repairing black anodizing, refer to P.846.




THBLTH5 and HBLTHB5 are offset. Can be combined with both cover plates of 5mm and 3mm



Features: Tabbed Reversal Brackets with two mounting holes on one side can connect extrusions more securely




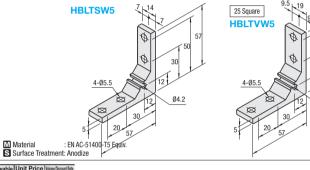

Part Number	Mass	Applica	able S	Screw, T Nut	Allowable	Unit Price	Volume Discount Rate	
Part Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200
HBLTSW5	26	CBM5-10	4	HNTT5-5	4	1176		
LIDITIONE	200	CBIVID-1U	4	G-CIINII	4	11/0		

Features: Extruded Brackets with Unequal Sides. Effective when strength is required in narrow clearances between extrusions.



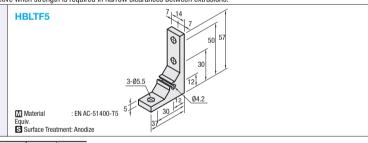

Alterations Code

Part	Mass	Applica	ble S	le Screw, T Nut		Allowable	Unit Price	Volume Discount Rate	
Number	(g)	Screw	Quantity	T Nut	Quantity	Load (N)	1~99 pc(s).	100~200	
HBLTF5	21	CBM5-10	3	HNTT5-5	3	1004			







(C, SET, SST, SEU, SSU, SEP, SSP, SEC)

Alterations	Code	Spec.	Applicable Bracket
Mounting Hole Alteration for Cover	Code	Adds taps on a bracket for cover mounting. (M5 on Both Sides) (Mounting Screw HCBM on P.754)	Applicable Bracket NBLTSS HBLTSS HBLTSS-4 CHBLTS5 HBLTV5 HBLTV5 NBLUSS HBLUSS HBKUSS HBKUSS HBKUSS HBKUSS HBKUSS HBKUSS HBLTHS HBLTHS HBLTHS
			HBLTVW5
			HBLTF5

Applicable Applic	711101111101110	0000		opot	"	Applicable Bracket
HBLTVW5 HBLTF5	Screws and	SST (Stainless Steel) SEU Pre-Assembly Insertion Spring Nuts SSU Pre-Assembly Insertion Spring Nuts SEP Post-Assembly Insertion Spring Nuts SEP Post-Assembly Insertion Spring Nuts SEP Post-Assembly Insertion Spring Nuts SEP EC SEC Stainless Steel SEC Stainless Steel Security SEP Post-Assembly Insertion Spring Nuts SEP Auto-Assembly Insertion Spring Nuts SEP Captured Washer Laptured Washer Laptured Washer	fixing t come ir (Adds to Code SET SST SEU SSU SEP SEC When HB	able screws he brackets a set. o the bracket hen HBLTS Screw CBM5-10 SCB5-10 CBM5-10 SCB5-10 HCBST5-12 an specifyl LTS5, ch	s and nuts for on extrusions t price) 5 is specified: Nut HNTT5-5 HNTTBS5-5 HNTTUS-5 SHNTUS-5 SHNTP5-5 HNTP5-5 HNTTP5-5 HNTTS-5 HNTTS-	NBLTS5 HBLTS5 HBLTS5-4 HBLTS55 CHBLTS5 CHBLTS5 HBLTV5 HBLTV5 HBLTV5 HBKTS15 HBKTS5 HBKTS5 HBKTS5 HBKUS5 HBLUS5

Screws for black anodized brackets are HCBMTB (Trivalent Chromate Black) on **P.751**. Included Screw is not RoHS compliant when -SET, -SEU or -SEP other than black anodized brackets is specified.