


Extruded Brackets - For 1 Slot

For 8-45 Series (Slot Width 10mm) Aluminum Extrusions




Features: Perpendicularly Machined Type Extruded Brackets with tabs to fit extrusions. Brackets with tabs to fit in slots of extrusions and stop rotating when tightening.

Thick Brackets (Perpendicularly Machined)




HBKTS8
HBKTS8
HBKTSB8
(Black Anodize)

Part Number	Perpendicularity K
HBKTS8	0.03
HBKTS8	0.06
HBKTSB8 (Black Anodize)	0.06



There are protrusions on the bracket bottom to be inserted into aluminum extrusion slots.



Type	Material	Surface Treatment
HBKTS8	EN AC-51400-T5	Anodize
HBKTS8	Equiv.	Black Anodize
HBKTSB8		Black Anodize

RoHS10

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price 1-99 pc(s).	Volume Discount Rate 100-200
		Screw	Quantity	T Nut	Quantity			
HBKTS8	65.8	CBM8-20	2	HNNT8-8	2	2058		
HBKTS8								
HBKTSB8* (Black Anodize)								



* For repairing black anodizing, refer to P846.

Features: Aluminum Extruded Brackets. Designed to prevent dust from building up with good appearance.

Thick Brackets



NBLTS8-45
HBLTS8-45
CHBLTS8-45
(Clear Coating)




Both sides and screw holes of NBLTS8-45 is not anodized.

Type	Material	Surface Treatment
NBLTS8-45	EN AW-6063-T5 Equiv.	Anodize
HBLTS8-45		Anodize
CHBLTS8-45	EN AC-51400-T5 Equiv.	Clear Paint Anodize (+ Clear Paint)



Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price 1-99 pc(s).	Volume Discount Rate 100-200
		Screw	Quantity	T Nut	Quantity			
NBLTS8-45	80	CBM8-20	2	HNNT8-8	2	2058		
HBLTS8-45								
CHBLTS8-45 (Clear Coating)								

Features: Extruded Brackets with Unequal Sides. Effective when strength is required in narrow clearances between extrusions.

Scalene Brackets

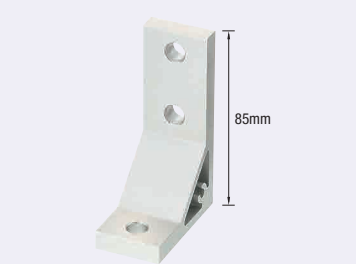

HBLTF8



Material: EN AC-51400-T5 Equiv. Surface Treatment: Anodize

RoHS10


Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price 1-99 pc(s).	Volume Discount Rate 100-200
		Screw	Quantity	T Nut	Quantity			
HBLTF8	90	CBM8-20	3	HNNT8-8	3	2572		

Features: Numbers of screws are the same as HBLTS8-45. Extrusions can be connected more securely.

Ultra Thick Brackets



HBLUS8
HBLUS8
(Black Anodize)



Type	Material	Surface Treatment
HBLUS8	EN AC-51400-T5	Anodize
HBLUSB8	Equiv.	Black Anodize

RoHS10

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price 1-99 pc(s).	Volume Discount Rate 100-200
		Screw	Quantity	T Nut	Quantity			
HBLUS8	151	CBM8-25	2	HNNT8-8	2	2058		
HBLUS8*								
(Black Anodize)								



* For repairing black anodizing, refer to P846.

Features: Numbers of screws are the same as HBKTS8. Extrusions can be connected more securely. Perpendicularly Machined.

Ultra Thick Brackets (Perpendicularly Machined)



HBKUS8
HBKUS8
(Black Anodize)
Perpendicularity K: 0.06



Type	Material	Surface Treatment
HBKUS8	EN AC-51400-T5	Anodize
HBKUSB8	Equiv.	Black Anodize

RoHS10

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price 1-99 pc(s).	Volume Discount Rate 100-200
		Screw	Quantity	T Nut	Quantity			
HBKUS8	151	CBM8-25	2	HNNT8-8	2	2058		
HBKUS8*								
(Black Anodize)								

* For repairing black anodizing, refer to P846.

Ordering Example **Part Number**
HBLUS8

Alterations **Part Number** - (C, SET, SST, SEU, SSU, SEP, SSP, SEC)
HBLUS8 - SET

Alterations	Code	Spec.	Applicable Bracket
Mounting Hole Alteration for Cover	C	Adds taps on a bracket for cover mounting. (M5 on Both Sides) (Mounting Screw HCBM on P754)	HBKTS8
			NBLTS8-45
			HBLTS8-45
			CHBLTS8-45
			HBLTF8
			HBKUS8
			HBLUS8

Alterations	Code	Spec.	Applicable Bracket	
Applicable Screws and Nuts Set	SET	Applicable screws and nuts for fixing the brackets on extrusions come in a set. (Adds to the bracket price.) (Ex.) When HBLTS8-45 is specified:	HBKTS8	
	SST		HBKTS8	
	SEU		SEU	NBLTS8-45
	SSU		SSU	HBLTS8-45
	SEP		SEP	CHBLTS8-45
	SSP		SSP	HBLTF8
	SEC		SEC	HBKUS8
	SEU		SEU	HBKUS8
	SSU		SSU	HBLUS8
	SEP		SEP	HBLUS8
	SSP		SSP	HBLUS8
	SEC		SEC	HBLUS8

Screws for black anodized brackets are HCBMTB (Trivalent Chromate Black) on P751.
Included Screw is not RoHS compliant when -SET, -SEU or -SEP other than black anodized brackets is specified.