


Plastic Cover Plates

U-Shaped




Part Number	Material	Grade	Color	Light Transmittance	Operating Ambient Temperature
ACAU	Acrylic	Standard	Transparent	93%	-30~80°C
ACBU			Smoke Brown	25%	
ACTAU		Antistatic Grade	Transparent	79%	
ACBTAU			Smoke Brown	32%	
PYAU	PET	Standard	Transparent	87%	-15~55°C
PYBU			Smoke Brown	28%	
PYTAU		Antistatic Grade	Transparent	77%	
PYBTAU			Smoke Brown	30%	

Standard Type (No Hole)




Pre-drilled Type

4 Holes 4H




6 Holes 6H



Hole Machining Details		Threaded Insert Machining Details																																																	
N (Through Hole)	P (Countersink)	M (Threaded Insert)																																																	
Screw Nominal Dia. Selection		Table 1																																																	
<table border="1"> <tr><th>Screw Nominal Dia.</th><th>3</th><th>4</th><th>5</th><th>6</th><th>8</th><th>10</th></tr> <tr><td>d</td><td>3.5</td><td>4.5</td><td>5.5</td><td>6.5</td><td>9</td><td>11</td></tr> <tr><td>d1</td><td>7.5</td><td>9.5</td><td>11.5</td><td>13.5</td><td>19</td><td>-</td></tr> <tr><td>h</td><td>2</td><td>2.5</td><td>3</td><td>3.5</td><td>5</td><td>-</td></tr> </table>		Screw Nominal Dia.	3	4	5	6	8	10	d	3.5	4.5	5.5	6.5	9	11	d1	7.5	9.5	11.5	13.5	19	-	h	2	2.5	3	3.5	5	-	<table border="1"> <tr><th>Screw Nominal Dia.</th><th>3</th><th>4</th><th>5</th><th>6</th></tr> <tr><td>d</td><td>3.5</td><td>4.5</td><td>5.5</td><td>6.5</td></tr> <tr><td>L</td><td>3</td><td>4</td><td>5</td><td>6</td></tr> <tr><td>L</td><td>4.5</td><td>6</td><td>7.5</td><td>6</td></tr> </table>		Screw Nominal Dia.	3	4	5	6	d	3.5	4.5	5.5	6.5	L	3	4	5	6	L	4.5	6	7.5	6
Screw Nominal Dia.	3	4	5	6	8	10																																													
d	3.5	4.5	5.5	6.5	9	11																																													
d1	7.5	9.5	11.5	13.5	19	-																																													
h	2	2.5	3	3.5	5	-																																													
Screw Nominal Dia.	3	4	5	6																																															
d	3.5	4.5	5.5	6.5																																															
L	3	4	5	6																																															
L	4.5	6	7.5	6																																															

Standard Type

Part Number	1mm Increment			T Selection			
	Type	B	A	L	ACAU ACBU	PYAU PYBU	ACTAU ACBTAU PYTAU PYBTAU
ACAU (Acrylic, Standard, Transparent)	30	30	30~500	L≤Bx3	3	3	3
ACBU (Acrylic, Standard, Smoke Brown)	200	200			4	4	-
ACTAU (Acrylic, Antistatic, Transparent)	100	201			5	5	5
ACBTAU (Acrylic, Antistatic, Smoke Brown)	200	360			6	-	-
PYAU (PET, Standard, Transparent)	100	201	L≤Bx3	L≤Bx3	4	4	4
PYBU (PET, Standard, Smoke Brown)	200	360			5	5	5
PYTAU (PET, Antistatic, Transparent)	200	360			6	-	-
PYBTAU (PET, Antistatic, Smoke Brown)	200	360			8	-	-

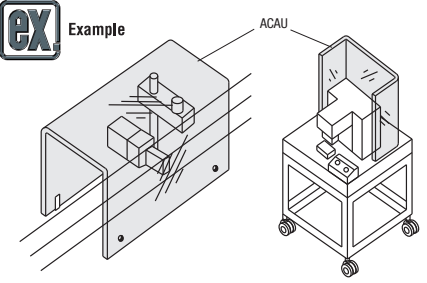

Antistatic coating on the curved section may be peeled off in antistatic grade.

Pre-drilled Type

Part Number	Number of Holes	1mm Increment			T Selection			1mm Increment		Screw Nominal Dia.					
		Type	B	A	L	ACAU ACBU	PYAU PYBU	ACTAU ACBTAU PYTAU PYBTAU	F	G	Through Hole N	Countersink P	Threaded Insert M	L	
ACAU (Acrylic, Standard, Transparent)	4H	30	30	30~500	L≤Bx3	3	3	3	6~491 (4H Type)	5, 355	3, 4, 5, 6, 8, 10	3	-	-	Select from Table 1
ACBU (Acrylic, Standard, Smoke Brown)		200	200			4	4	-				3 4 5	3		
ACTAU (Acrylic, Antistatic, Transparent)		100	201			5	5	5				3 4 5 6	3 4		
ACBTAU (Acrylic, Antistatic, Smoke Brown)		200	360			6	-	-				4 5 6	3 4 5		
PYAU (PET, Standard, Transparent)	6H	100	201	L≤Bx3	L≤Bx3	3	3	3	6~245 (6H Type)	5, 355	3, 4, 5, 6, 8, 10	3	-	-	Select from Table 1
PYBU (PET, Standard, Smoke Brown)		200	360			4	4	-				3 4 5	3		
PYTAU (PET, Antistatic, Transparent)		100	201			5	5	5				3 4 5 6	3 4		
PYBTAU (PET, Antistatic, Smoke Brown)		200	360			6	-	-				4 5 6	3 4 5		

Antistatic coating on the curved section may be peeled off in antistatic grade.
 Dimension F Specification Range: For 4H, $d+2.5 \leq F \leq L-d-5$; for 6H, $d+2.5 \leq F \leq L/2-d/2-2.5$.
 Dimension G Specification Range: $d/2+2.5 \leq G \leq A(B)-T-d/2-2.5$.

Ordering Example

Standard Type	Pre-drilled Type
Part Number: ACBU - B - A - L - T	Part Number: PYAU 4H - B - A - L - T - F - G - Screw Nominal Dia. - L
ACAU - 65 - 100 - 120 - 6	PYAU 4H - 50 - 80 - 100 - 5 - F76 - G15 - N5
	PYAU 4H - 100 - 120 - 200 - 5 - F160 - G20 - M4 - L4

Standard Type Unit Price

B	L	Unit Price									
		ACAU, ACBU			ACTAU, ACBTAU		PYAU, PYBU			PYTAU, PYBTAU	
		T3, T4	T5, T6	T8	T3, T5	T5	T3, T4	T5	T3, T5	T5	
30-39	30-60										
	61-90										
	91-117										
40-49	30-60										
	61-90										
	91-120										
	121-147										
50-59	30-60										
	61-90										
	91-120										
	121-150										
	151-177										
60-79	30-60										
	61-90										
	91-120										
	121-150										
	151-180										
	181-237										
80-99	30-60										
	61-90										
	91-120										
	121-150										
	151-180										
	181-210										
	211-240										
	241-270										
	271-297										
100-119	30-60										
	61-90										
	91-120										
	121-150										
	151-180										
	181-210										
	211-240										
	241-270										
	271-300										
	301-350										
	351-400										
120-149	30-60										
	61-90										
	91-120										
	121-150										
	151-180										
	181-210										
	211-240										
	241-270										
	271-300										
	301-350										
	351-400										
150-200	30-60										
	61-90										
	91-120										
	121-150										
	151-180										
	181-210										
	211-240										
	241-270										
	271-300										
	301-350										
	351-400										
	401-500										

Hole Machining Charge

Pre-drilled Type	Hole Machining Charge
4H	N (Through) P (Countersink) M (Threaded Insert)
6H	N (Through) P (Countersink) M (Threaded Insert)

Pre-drilled Type Price = Standard Type Unit Price + Hole Machining Charge

(Ex.) Part Number: ACBU 4H - B - A - L - T - F - G - Screw Nominal Dia. - L

ACBU 4H - 65 - 150 - 80 - 5 - F50 - G20 - N6

(Standard Type Unit Price) + (Hole Machining Charge) = Pre-drilled Type Price



Alterations

Part Number	B	A	L	T	F	G	Screw Nominal Dia.	L	(XC)
ACBU 4H	65	150	80	5	F50	G20	N6		XC10

