





Casters

Medium Load

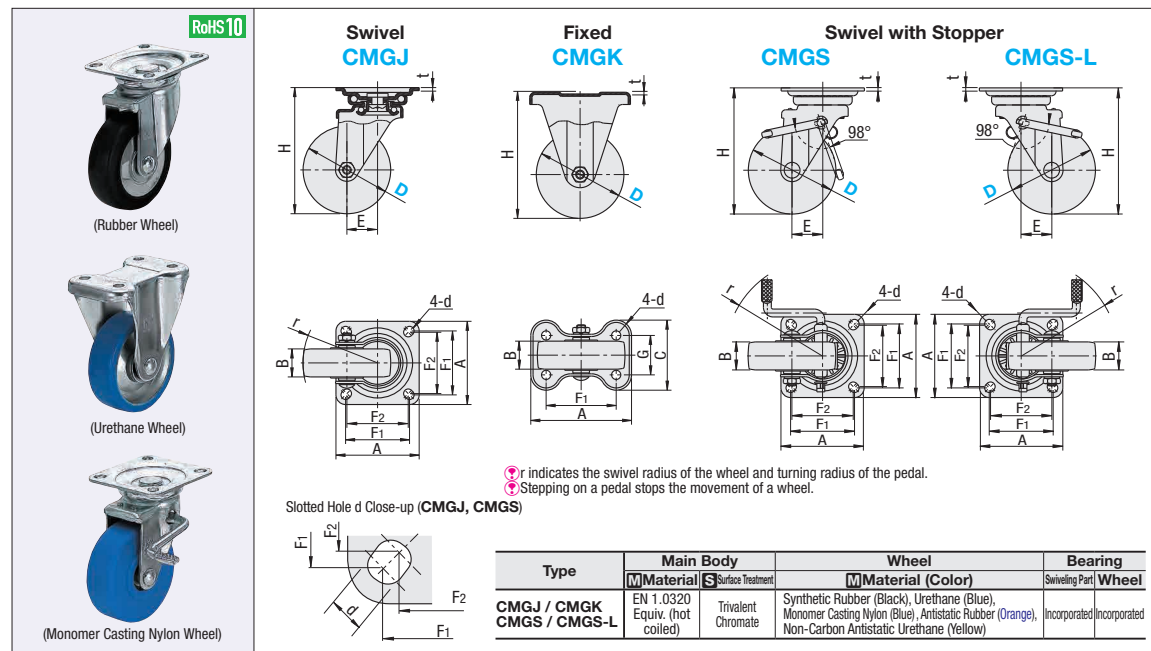


Main Body	Part Number		Wheel Material	H	A	C	F1	F2	G	d	E	(r)	B (*)	t	Allowable Load (N)					Mass (g)					Unit Price					
	Type	D													R	U	N	T	K	R	U	N	T	K	R	U	N	T	K	R
Swivel	CMGJ	75	R (Rubber)	100	81		63	-		9.5	28	66	32	2.3		800	1200	1200	800	1200	560	650	560	520						
		100		81		73	70		10.5	35	85	32 (34)	3.6	1200	1700	1800	1200	1700	1060	1240	1130	1060	1010							
		130		177	105	-	82	79			40	105	38 (42)		1800	2600	2700	1800	2600	2000	2210	2040	2000	2310						
		150		198	120		93	87		11	45	120	42 (44)	4	2000	3000	3000	2000	3000	2340	2620	2400	2340	2630						
		200		250	140		115	105			58	163	45 (42)	4.5	2500	3700	-	-	-	4020	4180	-	-	-	-	-	-	-	-	-
Fixed	CMGK	75	N (Monomer Casting Nylon)	100	95	71	63			40	9.5			32	2.3	800	1200	1200	800	1200	490	550	490	490	440					
		100		144	115	80	80		45	10.5			32 (34)		1200	1700	1800	1200	1700	830	1010	920	830	770						
		130		177		138	90	100			56			38 (42)	2.9	1800	2600	2700	1800	2600	1600	1870	1640	1600	1870					
		150		198						11				42 (44)		2000	3000	3000	2000	3000	1900	2190	1980	1900	2190					
		200		250	152	100	112			63				45 (42)	4	2500	3700	-	-	-	3350	3540	-	-	-	-	-	-	-	-
Swivel with Stopper	CMGS-L	75	K (Non-Carbon Antistatic Urethane)	100	81		63	-		9.5	28	89	32	2.3		800	1200	1200	800	1200	620	710	620	620	580					
		100		81		73	70		10.5	35	110	32 (34)	3.6	1200	1700	1800	1200	1700	1170	1350	1240	1170	1080							
		130		177	105	-	82	79			40	105	38 (42)		1800	2600	2700	1800	2600	2180	2390	2220	2180	2390						
		150		198	120		93	87		11	45	130	42 (44)	4	2000	3000	3000	2000	3000	2520	2800	2580	2520	2800						
		200		250	140		115	105			58			42		2500	3700	-	-	-	4250	4410	-	-	-	-	-	-	-	-

D200 is not available for CMGS-L. (*) D100, 130, and 150 represent the N wheel dimensions. D200 represents the U wheel dimensions

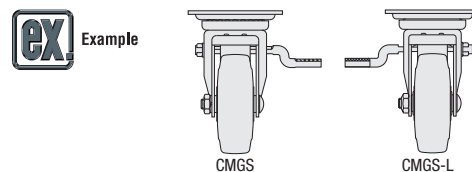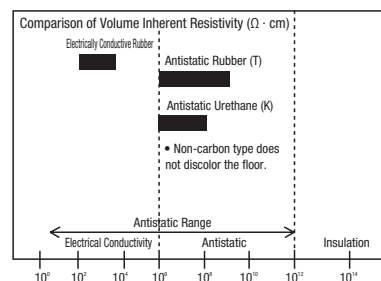


When used side by side, levers are located symmetrically (inside / outside).



- The same mounting plate standards are applicable to all types and sizes.
- No need to change mating hole pitches when changing the caster height (H) and loads.

Casters


Medium Load / Compatible Type

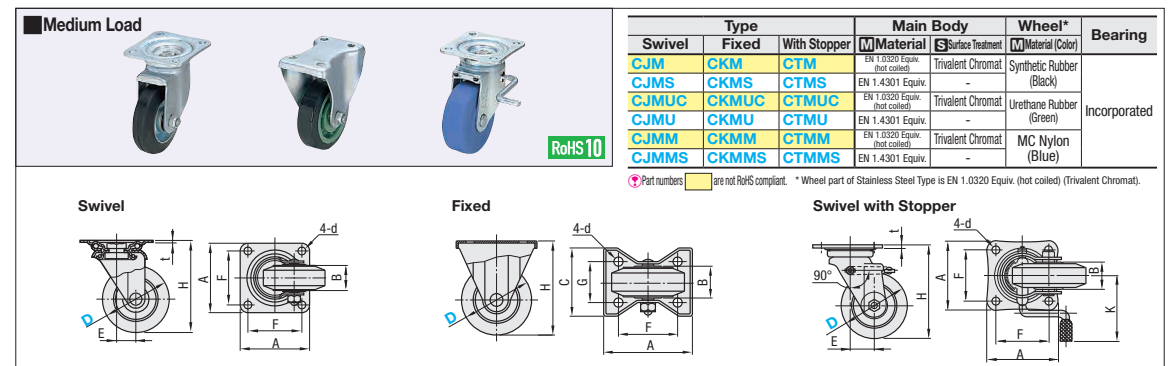

Main Body	D	Wheel Rim Width B	H	A	C	F	d	E	G	K	t	Allowable Load (N)			
												Synthetic Rubber Wheel	Urethane Rubber Wheel	MC Nylon Wheel	
														EN 1.0226 Equiv. Hot coated Body	Stainless Steel Body
Swivel	75	32	101	84	-	63	9.5	22	-	-	3.2	785	980	1667	2353
	100	40	144	96	-	71	10.5	35	-	-	4.5	1275	1470	2549	3529
	130	40	178	107	-	80	11.0	40	-	-	-	1765	2451	3530	4903
Fixed	75	32	101	95	72	63	9.5	-	-	-	-	785	980	1667	2353
	100	32	144	115	80	80	10.5	-	-	-	-	1275	1470	2549	3529
	130	40	178	138	93	100	11.0	-	-	-	-	1765	2451	3530	4903
With Stopper	75	32	101	84	-	63	9.5	22	-	70	3.2	785	980	1667	-
	100	32	144	96	-	71	10.5	35	-	90	4.5	1275	1470	2549	3529
	130	40	178	107	-	80	11.0	40	-	95	-	1765	2451	3530	4903

$$\text{Kgf (Load)} = N \times 0.101972$$

Main Body	Synthetic Rubber Wheel			Urethane Rubber Wheel			MC Nylon Wheel		
	Part Number		Unit Price	Part Number		Unit Price	Part Number		Unit Price
	Type	D		Type	D		Type	D	
Swivel	CJM	75		CJMUC	75		CJMM	75	
		100			100			100	
		130			130			130	
	CJMS (Stainless Steel)	75		CJMU (Stainless Steel)	75		CJMMS (Stainless Steel)	75	
		100			100			100	
		130			130			130	
Fixed	CKM	75		CKMUC	75		CKMM	75	
		100			100			100	
		130			130			130	
	CKMS (Stainless Steel)	75		CKMU (Stainless Steel)	75		CKMMS (Stainless Steel)	75	
		100			100			100	
		130			130			130	
With Stopper	CTM	75		CTMUC	75		CTMM	75	
		100			100			100	
		130			130			130	
	CTMS (Stainless Steel)	100		CTMU (Stainless Steel)	100		CTMMS (Stainless Steel)	100	
		130			130			130	

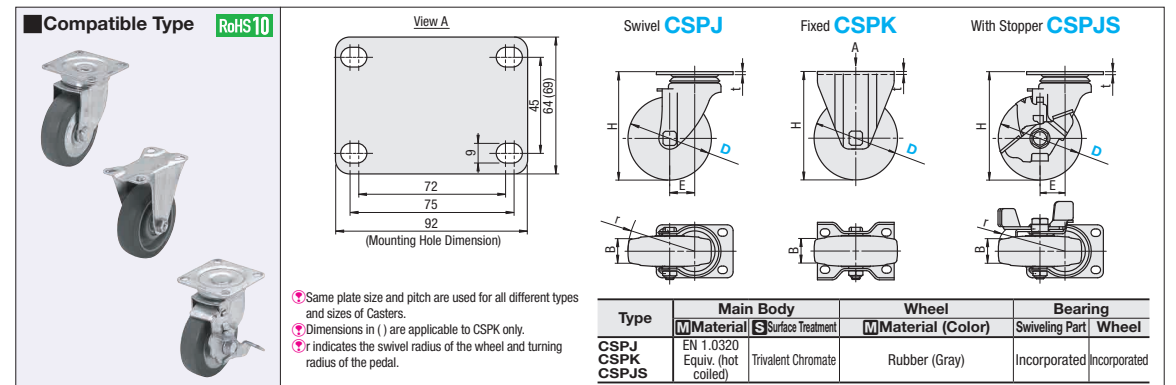

Main Body	Part Number		Wheel Material	H	B	r	t	E	Allowable Load (N)	Mass (g)	Unit Price
	Type	D									
Swivel	CSPJ	75	R (Rubber)	93	25	65	2.3	25	600	416	
		100		130	32	83	30	1200	982		
		125		157	32	101	35	1600	1071		
		150		190	32	118	40		1187		
Fixed	CSPK	75		93	25	-	2.3	-	600	317	
		100		130	32	-	2.5	-	1200	786	
		125		157	32				1600	802	
		150		190						957	
Swivel with Stopper	CSPJS	75		93	25	77	2.3	25	600	492	
		100		130	32	98	30	1200	1147		
		125		157	32	114	35	1600	1287		
		150		190	32	119	40		1414		

