

DIN 1530
1.3505 equivalent
Hardened



STRAIGHT EJECTOR PINS

—STANDARD TYPE—

DIN 1530
1.2344 equivalent
Hardened

STRAIGHT EJECTOR PINS

—L/L · P DIMENSION SPECIFY TYPE—

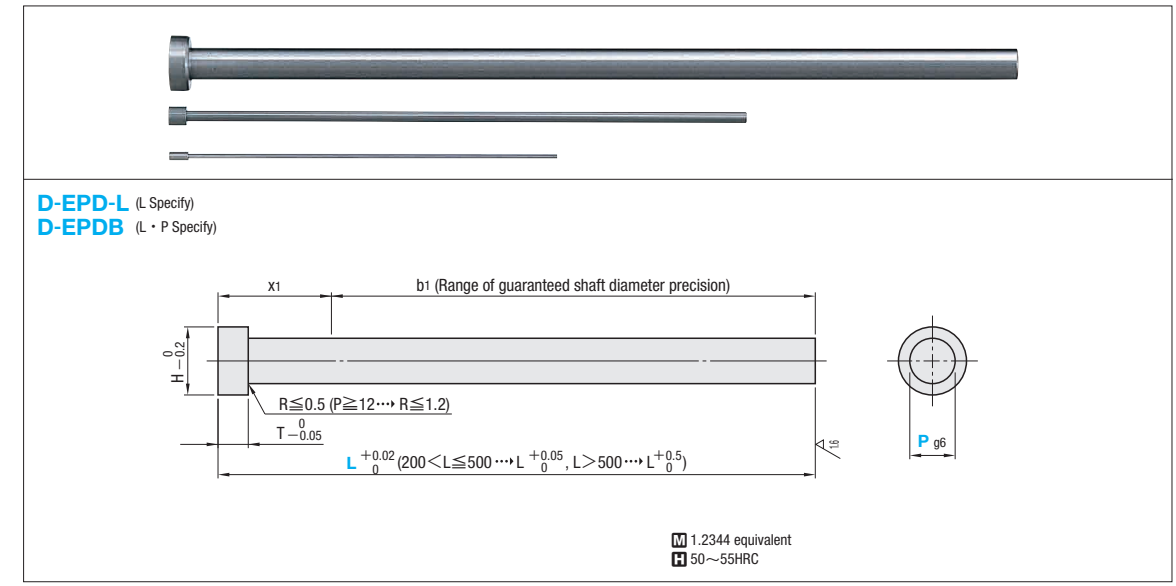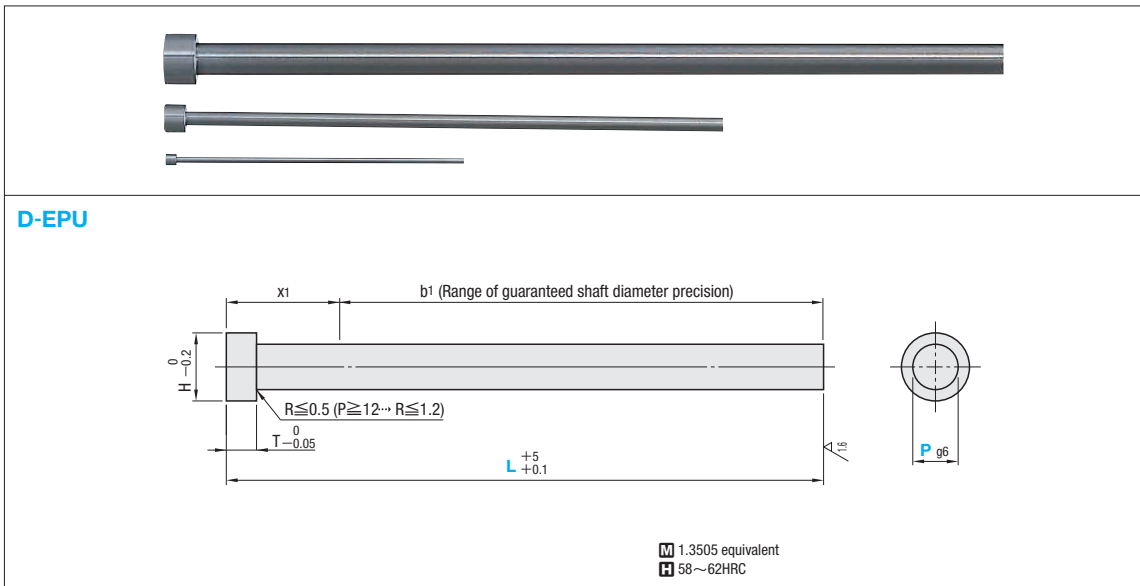

H	T	P g6	Part No.		L Selection						
			Type	P							
2.5	1.2	-0.002 -0.008	D-EPU	1	100	125	160	200	250		
				1.1	100	125	160	200			
				1.2	100	125	160	200	250		
3	1.5	-0.004 -0.012	1.5	100	125	160	200	250	315		
4	2		2	100	125	160	200	250	315	400	
5	2		2.5	100	125	160	200	250	315		
6	3	-0.004 -0.012	3	100	125	160	200	250	315	400	500
7			3.5	100	125	160	200	250	315	400	
8			4	100	125	160	200	250	315	400	500
10	5	-0.005 -0.014	4.5	100	125	160	200	250	315	400	500
12			5	100	125	160	200	250	315	400	500
14			5.5	100	125	160	200	250	315	400	
16	7	-0.006 -0.017	6	100	125	160	200	250	315	400	500
18			6.5	100	125	160	200	250	315	400	
22			7	100	125	160	200	250	315	400	500
24	8	-0.007 -0.020	7.5	100	125	160	200	250	315	400	
26			8	100	125	160	200	250	315	400	500
			8.5	100	125	160	200	250	315	400	
			9	100	125	160	200	250	315	400	
			9.5	100	125	160	200	250	315	400	
			10	100	125	160	200	250	315	400	500
			10.5	100	125	160	200	250	315	400	
			11	100	125	160	200	250	315	400	
			12	100	125	160	200	250	315	400	500
			12.5	100	125	160	200	250	315	400	
			14	100	125	160	200	250	315	400	500
			16	100	125	160	200	250	315	400	500
			18	125	160	200	250	315	400	500	
			20	100	125	160	200	250	315	400	500

L Dimension Specify

H	T	P g6	Part No.		L	
			Type	P	0.01mm increments	
2.5	1.2	-0.002 -0.008	D-EPD-L	1		40.00 ~ 200.00
3	1.5			1.5		
4	2			2		40.00 ~ 315.00
5	3	-0.004 -0.012	2.5		40.00 ~ 400.00	
6			3		40.00 ~ 500.00	
7			3.5		40.00 ~ 250.00	
8	5	-0.005 -0.014	4		40.00 ~ 200.00	
10			4.5		40.00 ~ 1000.00	
12			5		100.00 ~ 250.00	
14	7	-0.006 -0.017	6		100.00 ~ 1000.00	
16			6.5			
18			7			
22	8	-0.007 -0.020	8			
26			8			
32			10		100.00 ~ 500.00	

L · P Dimension Specify

H	T	P g6	Part No.		L		P	
			Type	No.	0.01mm increments	0.01mm increments		
2.5	1.2	-0.002 -0.008	D-EPDB	1		40.00 ~ 200.00	0.50 ~ 1.00	
3	1.5			1.5		1.01 ~ 1.50		
4	2			2		1.51 ~ 2.00		
5	3	-0.004 -0.012	2.5		2.01 ~ 2.50			
6			3		2.51 ~ 3.00			
7			3.5		3.01 ~ 3.50			
8	5	-0.005 -0.014	4		3.51 ~ 4.00			
10			4.5		4.01 ~ 4.50			
12			5		4.51 ~ 5.00			
14	7	-0.006 -0.017	5.5		5.01 ~ 5.50			
16			6		5.51 ~ 6.00			
18			6.5		6.01 ~ 6.50			
22	8	-0.007 -0.020	8		6.51 ~ 8.00			
26			8		8.01 ~ 10.00			
32			10		10.01 ~ 12.00			
			12		12.01 ~ 16.00			
			16		16.01 ~ 20.00			
			20		20.01 ~ 25.00			
			25					

Alteration details P.4

Alterations	Code	Spec.
	KC	Single flat cutting P/2 ≤ KC < H/2 About Designation Unit for Key Flat Cutting (1) To align the key flat with the shaft diameter (Unit of designation) D-EPD-L 0.05mm increments possible
	WKC	Two flats cutting P/2 ≤ WKC < H/2 D-EPDB 0.005mm increments possible (2) To designate arbitrary key flat dimensions (Unit of designation) 0.1mm

Alterations	Code	Spec.
	HC	HC=0.1mm increments P+1 ≤ HC < H, P ≥ 1.5

Order Part No. - L
D-EPD-L 1 - 100.00

Alterations Part No. - L - P - (KC · WKC etc.)
D-EPDB 12 - 350.00 - P11.00 - HC15

Order Part No. - L
D-EPU 3 - 100