WIDE FLYING CAM UNITS FOR PIERCE

—MGFVW・MEVWN—

CAM DIAGRAM P.1211

— With automatic alignment —
MGFVW500 (θ =50-60)

— Without automatic alignment —
MEVWN500 (θ =50-60)
(Economy type)

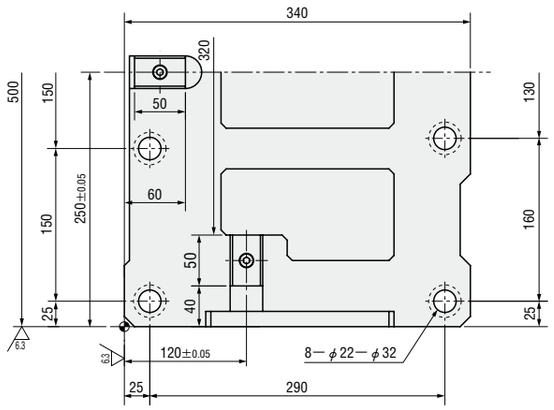

■Rear removal space



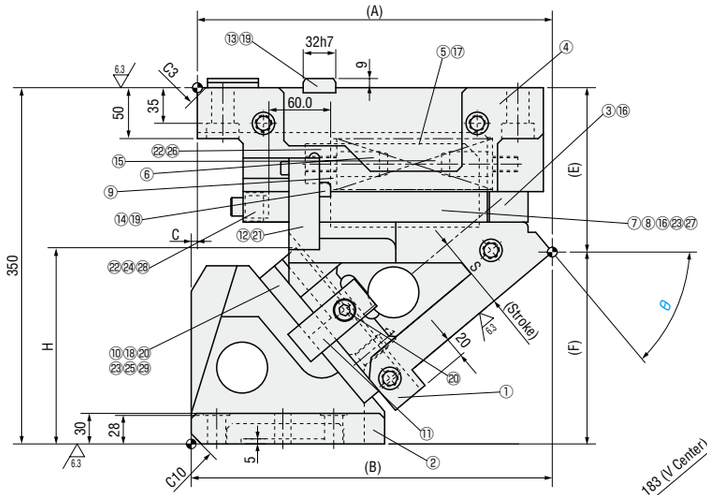

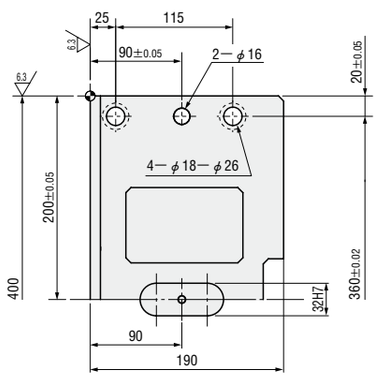

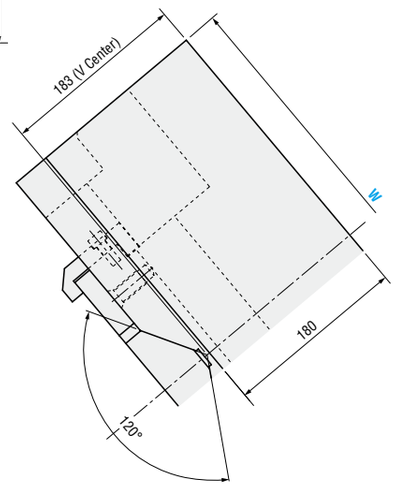

■Components table P.1213

W	θ	A	B	C	E	F	H	x
500	50	348.77	354.77	6	161.49	188.51	192.8	126
	60	332.75	377.75	45	195.83	154.17	202.1	152

Slide Stroke S	Working force KN (tonf)		Spring load N (kgf)			Total weight kg	Catalog No.	W	θ
	Standard working force	Max. working force	Preload	5mm before bottom dead center	Max. load				
93.3	313.8 (32.0)	627.6 (64.0)	2452 (250.0)	14056 (1433.3)	14710 (1500.0)	220.1	—With automatic alignment— MGFVW	500	50
120.0				14199 (1447.9)		236.5	—Without automatic alignment— MEVWN (Economy type)		60

Order

Catalog No.	W	—	θ
MGFVW	500	—	50

Days to Ship Quotation

Price Quotation

Alterations

Catalog No.	W	—	θ	—	(N・K・FK)
MGFVW	500	—	60	—	K

Alterations	Code	Spec.
	N	Add dowel hole Add 2 φ16H7 dowel holes on cam holder
	K	Add locating key (With 1 hexagon socket head cap screw M8×15) 
	FK	Move key position Move forward the locating key on cam holder.