

# Interface module - UM 45-FLK10/ZFKDS - 2293514

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



VARIOFACE module, with spring-cage connection and flat-ribbon cable connector, for mounting on NS 35/7.5, 10-pos.

The illustration shows a 20-position version



## Key commercial data

package_quantity	1
GTIN	4017918120412

## Technical data

### Dimensions

Width	54 mm
Height	45 mm
Depth	50 mm

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

### General

Nominal voltage $U_N$	< 50 V AC
Nominal voltage $U_N$	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	10
Status display	No
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
Standards/regulations	DIN EN 50178
Standards/regulations	IEC 62103
Pollution degree	2
Surge voltage category	II

### Connection data for connection 1

# Interface module - UM 45-FLK10/ZFKDS - 2293514

## Technical data

### Connection data for connection 1

<b>Connection name</b>	PCB connection
<b>Connection in acc. with standard</b>	IEC / EN
<b>Connection method</b>	Spring-cage connection
<b>Conductor cross section solid min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section stranded min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section stranded max.</b>	1.5 mm <sup>2</sup>
<b>Conductor cross section AWG/kcmil min.</b>	24
<b>Conductor cross section AWG/kcmil max</b>	14
<b>Stripping length</b>	8 mm

### Connection data for connection 2

<b>Connection name</b>	Flat-ribbon cable connection
<b>Number of connections</b>	1
<b>Connection method</b>	IDC/FLK pin strip (2.54 mm)
<b>Number of positions</b>	10

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27250313
<b>eCl@ss 4.1</b>	27250313
<b>eCl@ss 5.0</b>	27250313
<b>eCl@ss 5.1</b>	27250313
<b>eCl@ss 6.0</b>	27242608
<b>eCl@ss 7.0</b>	27141152
<b>eCl@ss 8.0</b>	27141152

### ETIM

<b>ETIM 2.0</b>	EC001434
<b>ETIM 3.0</b>	EC001604
<b>ETIM 4.0</b>	EC001604
<b>ETIM 5.0</b>	EC002780

### UNSPSC

<b>UNSPSC 6.01</b>	30211824
<b>UNSPSC 7.0901</b>	39121421
<b>UNSPSC 11</b>	39121421
<b>UNSPSC 12.01</b>	39121421
<b>UNSPSC 13.2</b>	39121421

# Interface module - UM 45-FLK10/ZFKDS - 2293514

## approvals

---

UL Recognized / cUL Recognized / GOST / cULus Recognized /

---

### Approval details

<b>UL Recognized</b>	
Nominal voltage UN	125 V
Nominal current IN	1 A
mm <sup>2</sup> /AWG/kcmil	

<b>cUL Recognized</b>	
Nominal voltage UN	125 V
Nominal current IN	1 A
mm <sup>2</sup> /AWG/kcmil	

<b>GOST</b>
-------------

<b>cULus Recognized</b>
-------------------------

## accessories

### Screwdriver tools

SZF 0-0,4X2,5 - 1204504



---

## System cable

## Interface module - UM 45-FLK10/ZFKDS - 2293514

### accessories

FLK 10/EZ-DR/ 50/KONFEK - 2299204



FLK 10/EZ-DR/ 100/KONFEK - 2299217



FLK 10/EZ-DR/ 150/KONFEK - 2299220



FLK 10/EZ-DR/ 200/KONFEK - 2299233



FLK 10/EZ-DR/ 300/KONFEK - 2299246



FLK 10/EZ-DR/ 400/KONFEK - 2299259



## Interface module - UM 45-FLK10/ZFKDS - 2293514

### accessories

---

FLK 10/EZ-DR/ 600/KONFEK - 2299262



FLK 10/EZ-DR/ 800/KONFEK - 2299275



FLK 10/EZ-DR/1000/KONFEK - 2299288




FLK EZ-DR.../.../... - 2295059



### Drawings

## Interface module - UM 45-FLK10/ZFKDS - 2293514

Circuit diagram

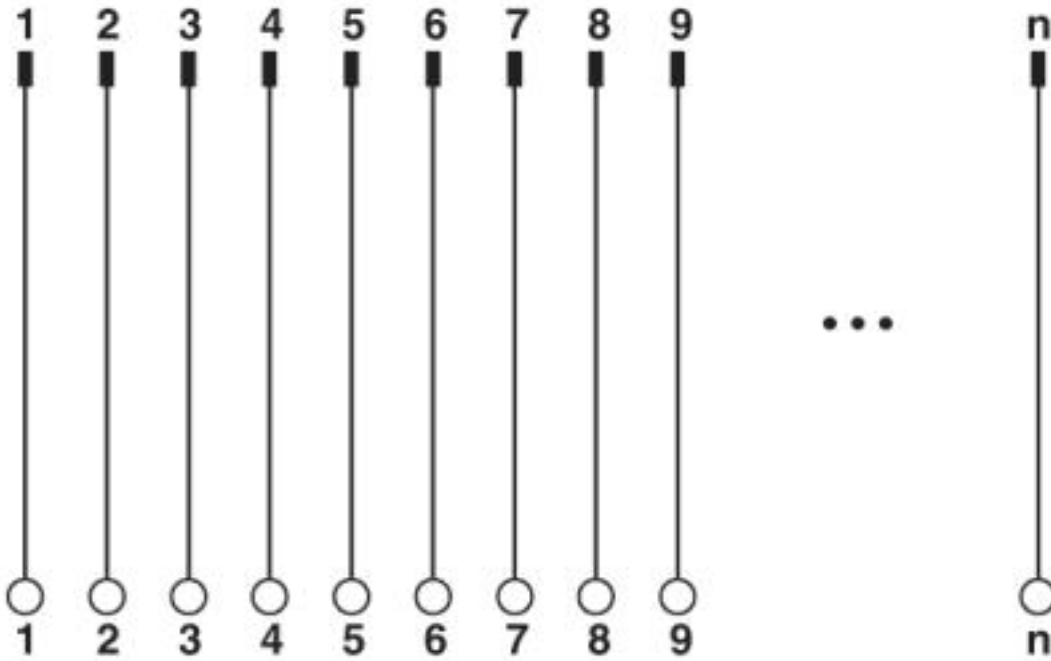

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>