

# Interface module - UM 45-FLK34/ZFKDS - 2293569

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



VARIOFACE module, with spring-cage connection and flat-ribbon cable connector, for mounting on NS 35/7.5, 34-pos.

The illustration shows a 20-position version



## Key commercial data

package_quantity	1
GTIN	4017918120467

## Technical data

### Dimensions

Width	110 mm
Height	45 mm
Depth	50 mm

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

### General

Nominal voltage $U_N$	< 50 V AC
Nominal voltage $U_N$	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	34
Status display	No
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
Standards/regulations	DIN EN 50178
Standards/regulations	IEC 62103
Pollution degree	2
Surge voltage category	II

### Connection data for connection 1

## Interface module - UM 45-FLK34/ZFKDS - 2293569

### Technical data

#### Connection data for connection 1

<b>Connection name</b>	PCB connection
<b>Connection in acc. with standard</b>	IEC / EN
<b>Connection method</b>	Spring-cage connection
<b>Conductor cross section solid min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section stranded min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section stranded max.</b>	1.5 mm <sup>2</sup>
<b>Conductor cross section AWG/kcmil min.</b>	24
<b>Conductor cross section AWG/kcmil max</b>	14
<b>Stripping length</b>	8 mm

#### Connection data for connection 2

<b>Connection name</b>	Flat-ribbon cable connection
<b>Number of connections</b>	1
<b>Connection method</b>	IDC/FLK pin strip (2.54 mm)
<b>Number of positions</b>	34

### classifications

#### eCl@ss

<b>eCl@ss 4.0</b>	27250313
<b>eCl@ss 4.1</b>	27250313
<b>eCl@ss 5.0</b>	27250313
<b>eCl@ss 5.1</b>	27250313
<b>eCl@ss 6.0</b>	27242608
<b>eCl@ss 7.0</b>	27141152
<b>eCl@ss 8.0</b>	27141152

#### ETIM

<b>ETIM 2.0</b>	EC001434
<b>ETIM 3.0</b>	EC001604
<b>ETIM 4.0</b>	EC001604
<b>ETIM 5.0</b>	EC002780

#### UNSPSC

<b>UNSPSC 6.01</b>	30211824
<b>UNSPSC 7.0901</b>	39121421
<b>UNSPSC 11</b>	39121421
<b>UNSPSC 12.01</b>	39121421
<b>UNSPSC 13.2</b>	39121421

# Interface module - UM 45-FLK34/ZFKDS - 2293569

## approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized /

### Approval details

<b>UL Recognized</b>	
Nominal voltage UN	125 V
Nominal current IN	1 A
mm <sup>2</sup> /AWG/kcmil	

<b>cUL Recognized</b>	
Nominal voltage UN	125 V
Nominal current IN	1 A
mm <sup>2</sup> /AWG/kcmil	

<b>GOST</b>
-------------

<b>cULus Recognized</b>
-------------------------

## accessories

### Screwdriver tools

SZF 0-0,4X2,5 - 1204504



## System cable

## Interface module - UM 45-FLK34/ZFKDS - 2293569

### accessories

FLK 34/EZ-DR/ 50/KONFEK - 2299479



FLK 34/EZ-DR/ 100/KONFEK - 2299482



FLK 34/EZ-DR/ 150/KONFEK - 2299495



FLK 34/EZ-DR/ 200/KONFEK - 2299505



FLK 34/EZ-DR/ 300/KONFEK - 2299518



FLK 34/EZ-DR/ 400/KONFEK - 2299521



## Interface module - UM 45-FLK34/ZFKDS - 2293569

### accessories

---

FLK 34/EZ-DR/ 600/KONFEK - 2299534



FLK 34/EZ-DR/ 800/KONFEK - 2299547



FLK 34/EZ-DR/1000/KONFEK - 2299550




FLK EZ-DR.../.../... - 2295059



### Drawings

## Interface module - UM 45-FLK34/ZFKDS - 2293569

Circuit diagram

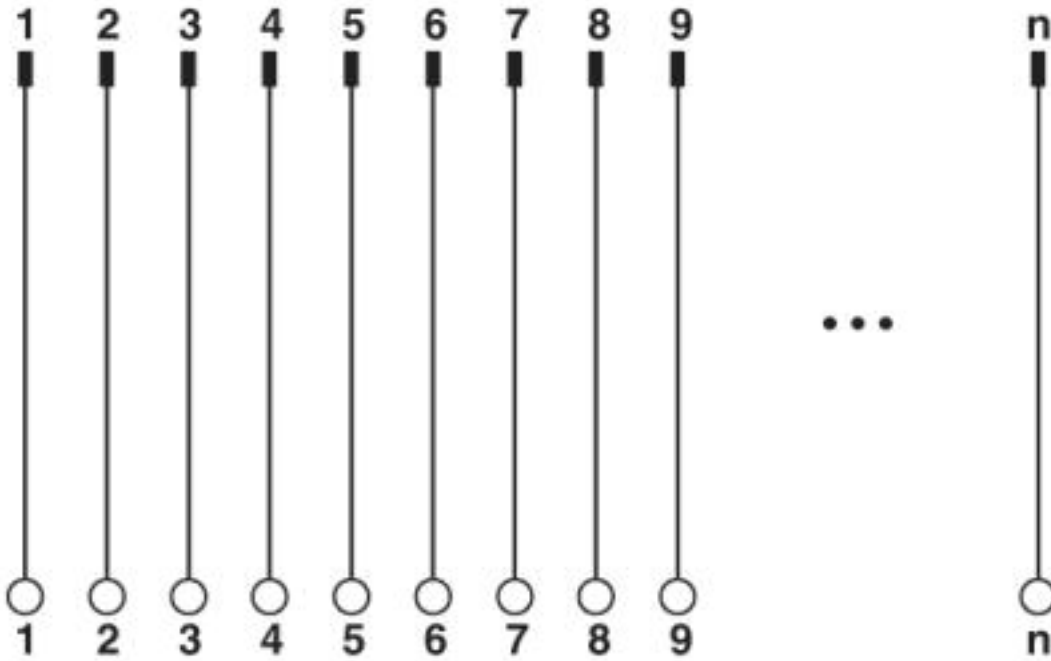

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>