

Ball Lock Pins with Ring Handle• single acting - according to NASM / MS 17987

4213.C35

**Product Description**

Quick Release Pins according to NASM (former norm: MS) are used for quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

Quick Release Pins (Single Acting Ball Lock Pins / Ball Lock Pins) are produced according to Aviation Norm NASM (former norm: MS) and tested to NAS 1332.

A standard program is available from stock (refer to article table). Delivery time for customer orders and dimensions not mentioned here currently 8 weeks. Please note the minimum order quantity of 20 pieces.

Material**Pin ①**

- Stainless steel, precipitation-hardened, passivated

Press bolt ②

- Stainless steel, precipitation-hardened, passivated

Spring ③

- Stainless steel, precipitation-hardened, passivated

Handle ④

- Stainless steel, passivated

Attaching ring ⑤

- Stainless steel, passivated

Ball ⑥

- Stainless steel, precipitation-hardened, passivated

Operation

The balls are unlocked by pressing the knob.

More information**Notes**


Special types on request.

All further dimensions are available on request.

Further products

- Warning Streamers, according to NAS1756

Drawing

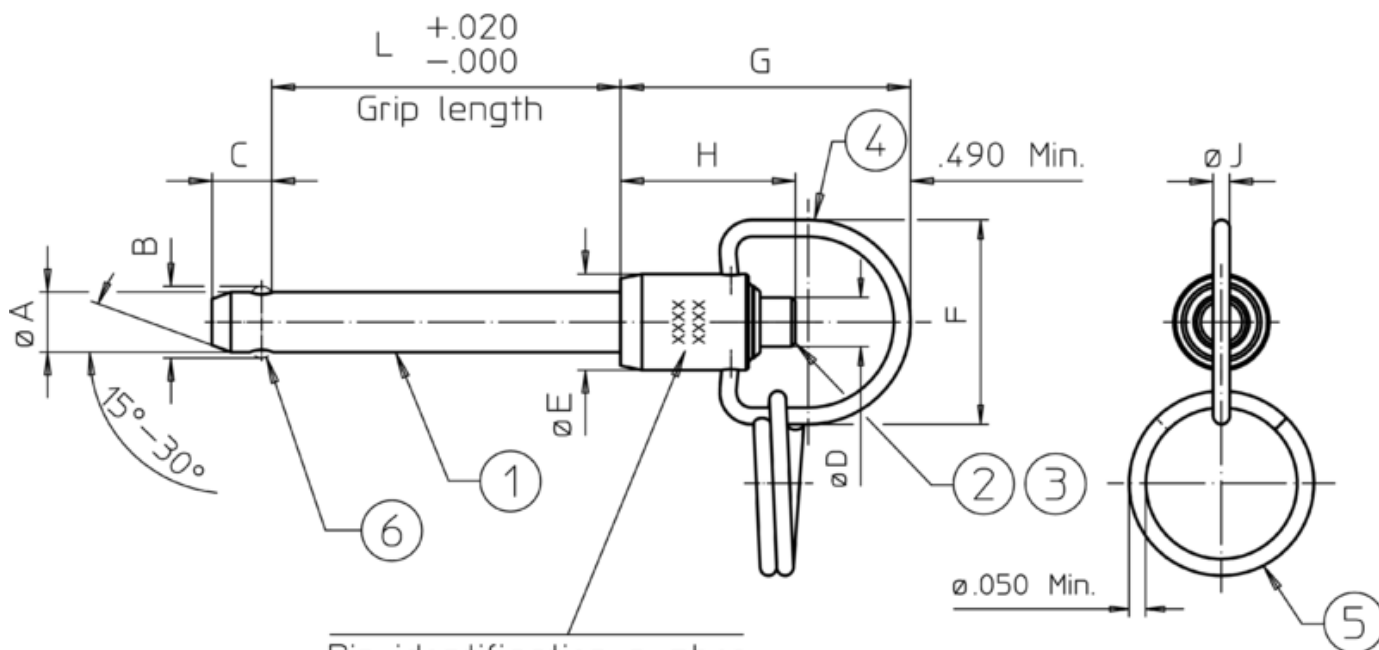

Pin identification number

Example:

Basic standard number
Material: "C" – Corrosion resistant steel pin
Shank diameter in 1/16" (here: 4/16" = 1/4")
Grip length in 1/10" (here: 12/10" = 1.2")
MS17987C412
EH 40.0130
Production lot number
Company identification

Ball positions may be different than shown in the drawing (rotation may be possible).

Order information

Nominal diameter A	Clamping Length L +0,02 0	Dimensions							Location hole max.	Shearing resistance, double ¹⁾ min.				Art. No.
		B	C	D	E	G	H	J			min.	max.		
		±0,005	0 -0,04	max.	max.	max.	min.	min.						
[inch]	[inch]			[inch]				[inch]	[lb]	[°F]		[g]		
5/16	3,5	0,375	0,33	0,31	0,59	1,65	0,83	0,08	0,3165	14,400	-22	302	59	4213.C35

¹⁾ Shearing resistance similar to DIN 50141