

Ball Lock Pins with Ring Handle• single acting - according to NASM / MS 17987

4213.D09



Product Description

Quick Release Pins according to NASM (former norm: MS) are used for quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

Quick Release Pins (Single Acting Ball Lock Pins / Ball Lock Pins) are produced according to Aviation Norm NASM (former norm: MS) and tested to NAS 1332.

A standard program is available from stock (refer to article table). Delivery time for customer orders and dimensions not mentioned here currently 8 weeks. Please note the minimum order quantity of 20 pieces.

Material

Pin ①

- Stainless steel, precipitation-hardened, passivated

Press bolt ②

- Stainless steel, precipitation-hardened, passivated

Spring ③

- Stainless steel, precipitation-hardened, passivated

Handle ④

- Stainless steel, passivated

Attaching ring ⑤

- Stainless steel, passivated

Ball ⑥

- Stainless steel, precipitation-hardened, passivated

Operation

The balls are unlocked by pressing the knob.

More information

Notes


Special types on request.

All further dimensions are available on request.

Further products

- Warning Streamers, according to NAS1756

Drawing

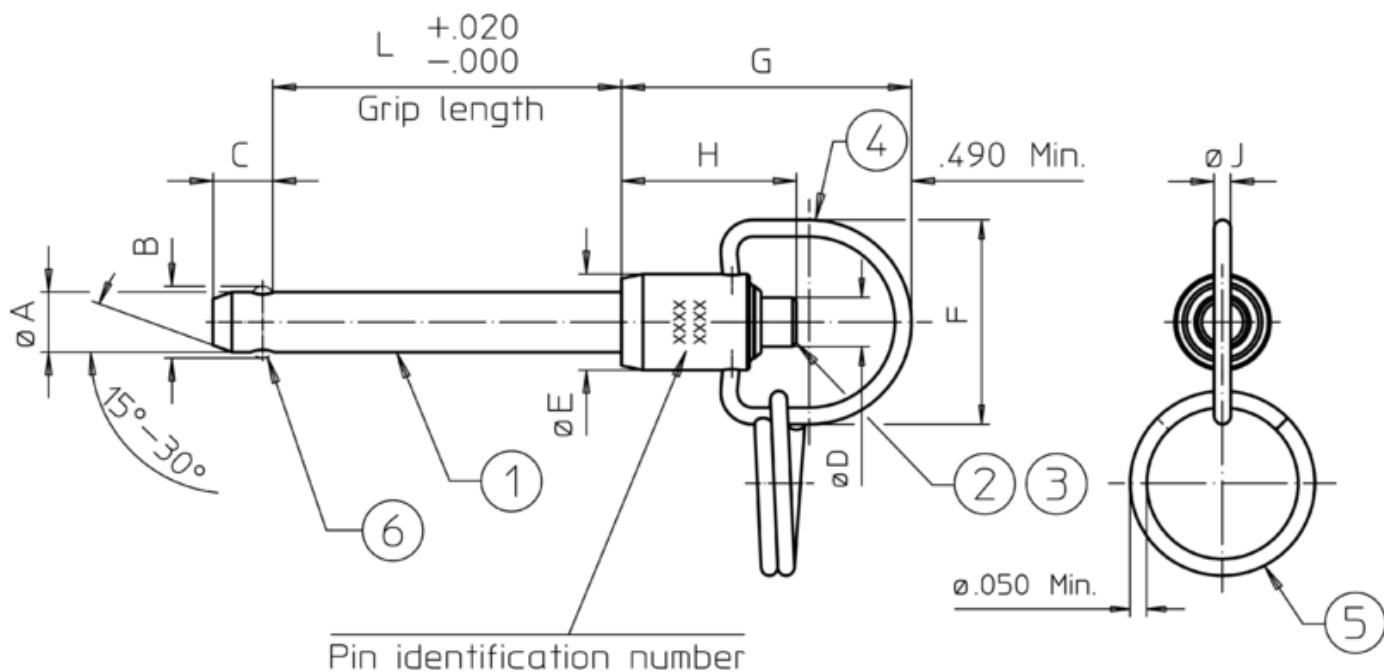

Example:

MS17987C412

EH 40.0130

Basic standard number

Material: "C" – Corrosion resistant steel pin

Shank diameter in 1/16" (here: 4/16" = 1/4")

Grip length in 1/10" (here: 12/10" = 1.2")

Production lot number

Company identification

Ball positions may be different than shown in the drawing (rotation may be possible).

Order information

Nominal diameter A [inch]	Clamping length L [inch]	Dimensions						Location hole max. [inch]	Shearing resistance, double ¹⁾ min. [lb]	min. max.	[g]	Art. No.
		B ±0,005	C 0 -0,04	D max.	E max.	G max.	H min.					
3/8	0,9	0,44	0,365	0,39	0,65	1,65	0,94	0,08	0,379	20,700	-22 302	50 4213.D09

¹⁾ Shearing resistance similar to DIN 50141