

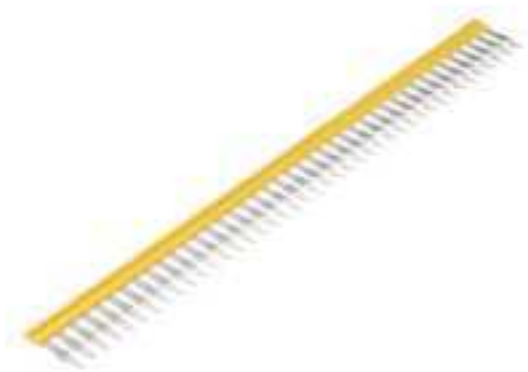
**ZQV 4N/41****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

Version	W-Series, Cross-connector, 32 A
Order No.	<a href="#">1758270000</a>
Type	ZQV 4N/41
GTIN (EAN)	4032248169801
Qty.	10 pc(s).
Delivery status	<b>This article will no longer be available in the future.</b>
Available until	2021-12-31
Alternative product	<a href="#">2883810000</a>

Creation date March 3, 2023 4:52:47 PM CET

Catalogue status 18.02.2023 / We reserve the right to make technical changes.

**ZQV 4N/41****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	25.7 mm	Depth (inches)	1.012 inch
Height	248.8 mm	Height (inches)	9.795 inch
Width	2.8 mm	Width (inches)	0.11 inch
Net weight	2 g		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

**Material data**

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

**System specifications**

Version	For the terminals
---------	-------------------

**Additional technical data**

Type of fixing	Plugged
----------------	---------

**Cross-connector**

Rated current, 2-pole	32 A	Rated current, multi-pole	32 A
Type	Cross-connector		

**Dimensions**

Pitch in mm (P)	6.1 mm
-----------------	--------

**General**

Number of poles	41
-----------------	----

**Rating data**

Rated current	32 A
---------------	------

**Classifications**

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40
ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40

**Important note**

Product information	Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

## ZQV 4N/41

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Technical data

## Approvals

Approvals



ROHS

Conform

## Downloads

Approval/Certificate/Document of  
Conformity

[EAC certificate](#)

Engineering Data

[CAD data – STEP](#)

Engineering Data

[WSCAD, Zuken E3.S](#)

User Documentation

[StorageConditionsTerminalBlocks](#)  
[BPZL ZQV 2.5](#)

Catalogues

[Catalogues in PDF-format](#)