

**SCM-I QV P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Cross-connection for the sockets in the RIDERSERIES  
RCM

**General ordering data**

Version	RIDERSERIES RCM, Cross-connector
Order No.	<a href="#">8870850000</a>
Type	SCM-I QV P
GTIN (EAN)	4032248631698
Qty.	10 Stück

Erstellungs-Datum May 25, 2023 12:07:20 PM CEST

Katalogstand 12.05.2023 / Technische Änderungen vorbehalten

## SCM-I QV P

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technische Daten

### Dimensions and weights

Width	28 mm	Width (inches)	1.102 inch
Net weight	1.2 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-45 °C...70 °C
Operating temperature, min.	-45 °C	Operating temperature, max.	70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

### Cross-connection data

Rated current	12 A	Insulation	Yes
Touch-safe protection	Yes	Colour	white
Number of cross-connected terminals	2	Pitch in mm (P)	25.5 mm
Type of mounting	Plugged		

### General data

Colour	white
--------	-------

### Connection data

Pitch in mm (P)	25.5 mm
-----------------	---------

### Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ETIM 8.0	EC002586	ECLASS 9.1	27-37-16-92
ECLASS 10.0	27-37-16-92	ECLASS 11.0	27-37-16-92
ECLASS 12.0	27-37-16-92		

### Approvals

Approvals



ROHS	Conform
------	---------

### Downloads

Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">WSCAD, EPLAN</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

## SCM-I QV P


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Zeichnungen

### Example of use


#### How to install cross connection

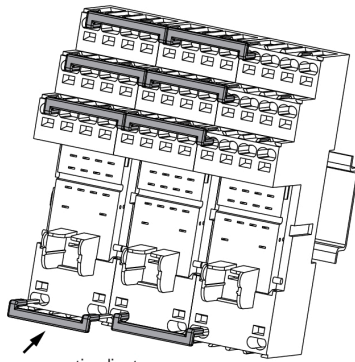

Plug cross connection direct into wire-connection opening

Plug the cross-connection in the cable connections

### Example of use

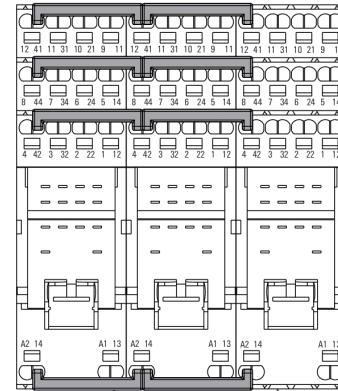

Cross connection:  
SCM-I QV P  
Part-No. 8870850000

Sockets:  
SCM-I xCO P  
Cross-connector bridges to the same connection on the neighbouring base