



FAG

## ★ B71926-E-T-P4S-UL


Spindle bearing

Schaeffler ID:  
0167276300000

Spindle bearing B719...-E-T-P4S, with steel balls

★ Preferred product

## Technical information

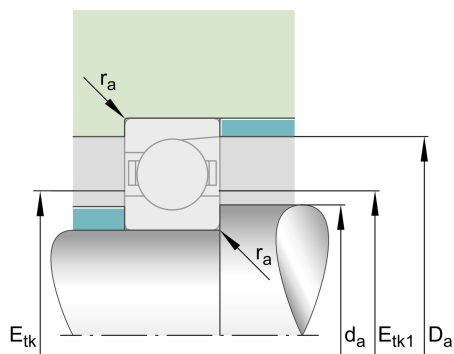

## Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.
	1,49 kg	Weight

## Main Dimensions &amp; Performance Data

d	130 mm	Bore diameter
D	180 mm	Outside diameter
B	24 mm	Width
$C_r$	85.000 N	Basic dynamic load rating, radial
$C_{0r}$	67.000 N	Basic static load rating, radial
$C_{ur}$	5.700 N	Fatigue load limit, radial
$n_{G \text{ Grease}}$	6.700 1/min	Limiting speed for grease lubrication
$n_{G \text{ Oil}}$	10.000 1/min	Limiting speed for oil lubrication

## Dimensions

$r_{\min}$	1,5 mm	Minimum chamfer dimension
$r_{1 \min}$	1,5 mm	Minimum chamfer dimension
$\alpha$	25 °	Contact angle



### Mounting dimensions

$d_a$	139 mm	Diameter shaft shoulder
$d_a$	h12	Diameter shaft shoulder clearance
$D_a$	171 mm	Shoulder diameter outer ring
$D_a$	H12	Shoulder diameter outer ring clearance
$r_{a \max}$	0,6 mm	Maximum recess radius
$r_{a1 \max}$	0,6 mm	Maximum recess radius
$E_{tk \min}$	145,5 mm	Minimum diameter injection pitch
$E_{tk \max}$	150,7 mm	Maximum diameter injection pitch
$E_{tk1 \min}$	145,5 mm	Minimum diameter injection pitch
$E_{tk1 \max}$	150,7 mm	Maximum diameter injection pitch
$a$	48,1 mm	Distance between the apexes of the pressure cones

### Additional information

$F_{VL}$	711 N	Preload force light
$F_{VM}$	2.466 N	Preload force medium
$F_{VH}$	5.161 N	Preload force heavy
$K_{aEL}$	2.064 N	Lift-off force light
$K_{aEM}$	7.379 N	Lift-off force medium
$K_{aEH}$	15.916 N	Lift-off force heavy
$c_{aL}$	275 N/ $\mu$ m	Axial rigidity light
$c_{aM}$	438 N/ $\mu$ m	Axial rigidity medium
$c_{aH}$	590 N/ $\mu$ m	Axial rigidity heavy