

SAI-M23-GS-7/12**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



The M23 round plug-in connectors offer a high number of mating cycles, high current-carrying capacity and high contact-density coupled with minimum dimensions. Enclosures, inserts and crimp contacts need to be ordered separately.

General ordering data

Version	Sensor/Actuator plug-in connector, Empty enclosure
Order No.	1995840000
Type	SAI-M23-GS-7/12
GTIN (EAN)	4032248926121
Qty.	1 pc(s).

SAI-M23-GS-7/12

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	71 g	www.weidmueller.com
------------	------	---------------------

Temperatures

Operating temperature, min.	-40 °C	Operating temperature, max.	125 °C
-----------------------------	--------	-----------------------------	--------

Technical data customisable plug-in connectors

Cable diameter, max.	12 mm	Cable diameter, min.	7 mm
Housing main material	Copper-zinc alloy	Plugging cycles	> 1000
Pollution severity	3	Protection degree	IP67, IP69K
Shield connection	Yes	Temperature range of housing	-40...+125 °C

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC003556
ETIM 8.0	EC003556	ECLASS 9.1	27-44-02-02
ECLASS 10.0	27-44-02-24	ECLASS 11.0	27-44-02-24
ECLASS 12.0	27-44-02-24		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	1c533b66-fcff-4da5-b89f-fd55fbf5cb55

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E344862

Downloads

Engineering Data	CAD data – STEP
Engineering Data	WSCAD, Zuken E3.S
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

SAI-M23-GS-7/12**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

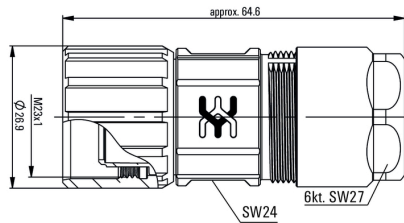
32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings**Dimensioned drawing**

Cable connector

